
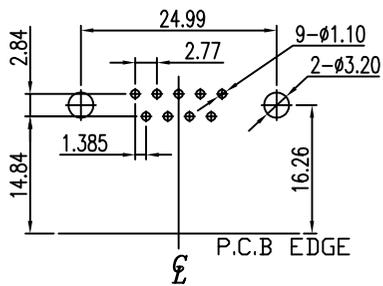
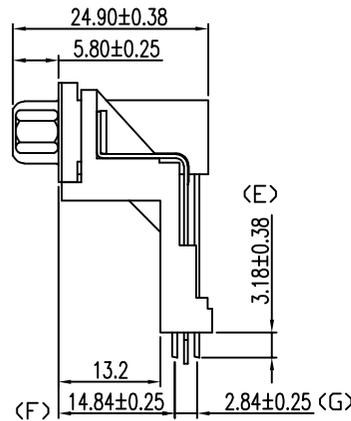



REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2019/06/12	Mike

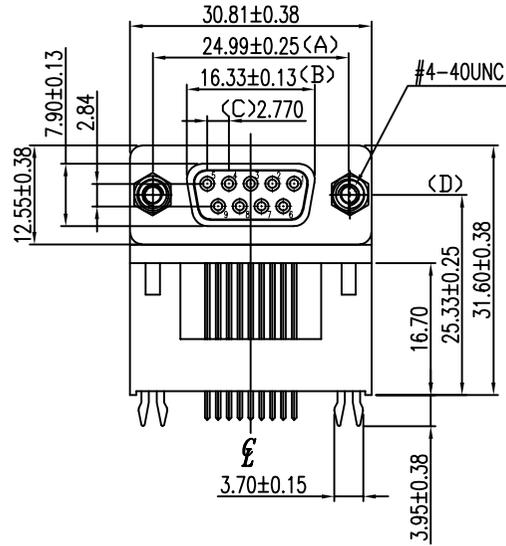

RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS

- D-SUB
- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 5000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000V AC(RMS)
- 1.6 Total Mating Force: 4.0 Kgf Max.
- 1.7 Total Unmating Force: 1.0 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C

NOTES

- MATERIAL:
 - Housing:PBT, UL 94V-0, Color:Black.
 - Bracket:PBT, UL 94V-0, Color:Black.
 - Terminal:Copper Alloy.
 - Shell:SPCC.
 - Boardlock:Steel.
 - Rivet:Copper Alloy.
- FINISH:
 - Terminal:Gold Plated over Nickel at Contact Area.
 - Tin Plated over Nickel at Solder Ared.
 - Shell:Nickel Plated.
 - Boardlock:Tin Plated.
 - Rivet:Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.

EAST-D111AP2A31R


- r: IT'S COMPLIANT WITH RoHs
- INSULATOR MATERIALS
 - 1: PBT
 - 3: PA9T
- COLOR STYLE
 - 1: ALL BLACK
 - 2: ALL BLUE
 - 3: HOUSING-GREEN, BRACKET-BLACK
- FLANGE MOUNTING OPTION
 - 1: #4-40 THREADED HOLE
- A: #4-40 THREADED HOLE WITH #4-40UNC SCREWLOCK INSTALLED (4.8x11.8)
- B: #4-40 THREADED HOLE WITH #4-40UNC SCREWLOCK BULK-PACKED (4.8x11.8)
- E: #4-40 THREADED HOLE WITH #4-40UNC SCREWLOCK INSTALLED (5.8x13.0)
- F: #4-40 THREADED HOLE WITH #4-40UNC SCREWLOCK BULK-PACKED (5.8x13.0)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	CUSTOMER COPY	深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560	
	DRAWN: Qinx	2019/06/12	TITIAL: D-SUB 9 FEMALE HIGH RAISE
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue CO.,LTD. SHALL NOT BE REPRODUCED.	CHECKED: Chenlei	2019/06/12	PART NO: EAST-D111AP2A31R
	APPROVED: Chenlei	2019/06/12	DRAWING NO: (RoHS)
	UNIT: mm	SCALE: N/A	SHEET: 1/1
			REV: A

INSPECTION DIMENSION:(A)~(H)

REV.	EQN. NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2013/02/05	Mike

包装图

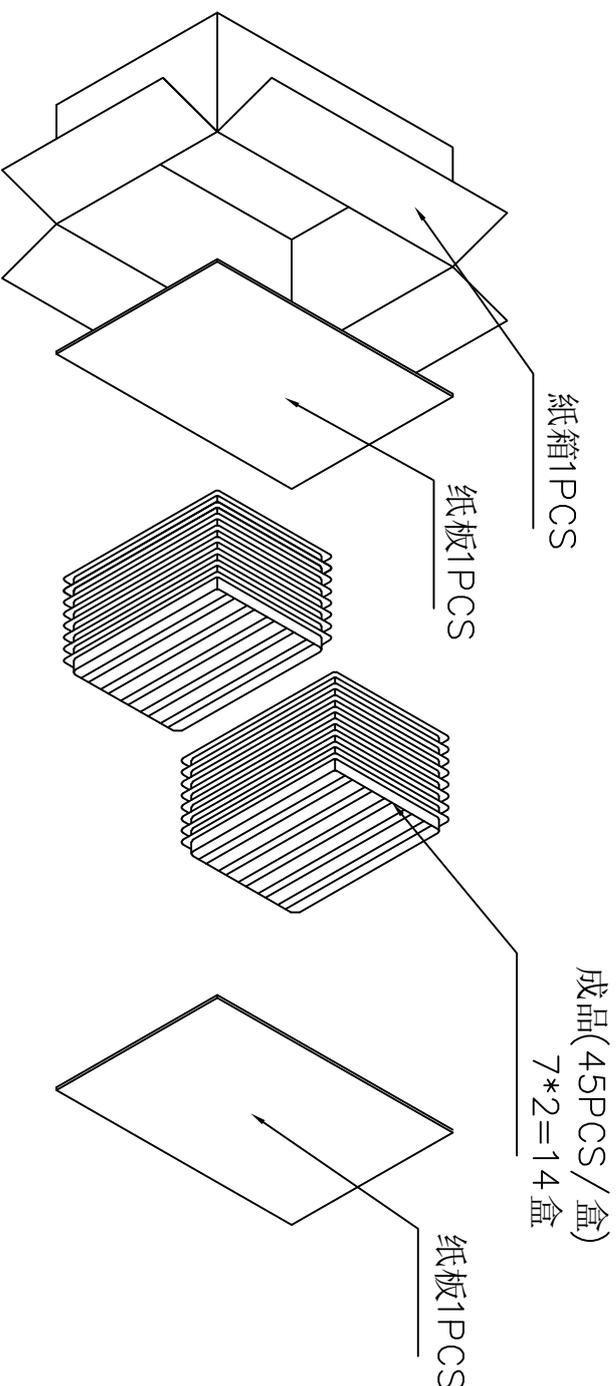

加厚纸箱: 45*31*22.5CM

	X.XX	X.XX	45*14=630
料	號	N.W: (KG)	G.W: (KG) DOTY(PCS)

TOLERANCES UNLESS OTHERWISE SPECIFIED:		INSPECTION COPY		深圳市东方御业科技有限公司 TEL.:0755-27155560 WWW.DFYCONN.COM	
X	± 0.38	DRAWN:	Qlnkx	2013/02/05	TITLE: 9-19, 05悬空塑胶支架半金雾糊
X X	± 0.25	CHECKED:	Chenlei	2013/02/05	樟壳二叉锁5.8绿支架黑PBT成品 (ROHS)
X.XXX	± 0.20	APPROVED:	Chenlei	2013/02/05	PART NO:
X:XXX	±.3°				DRAWING NO:
Angle					
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue CO.,LTD. SHALL NOT BE REPRODUCED.					
UNIT:	mm	SCALE:	N/A	SHEET:	1/1
REV:	A				

DO NOT SCALE PRINT