

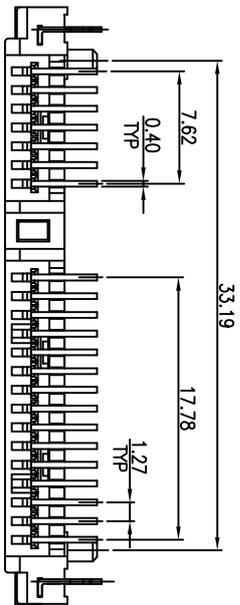
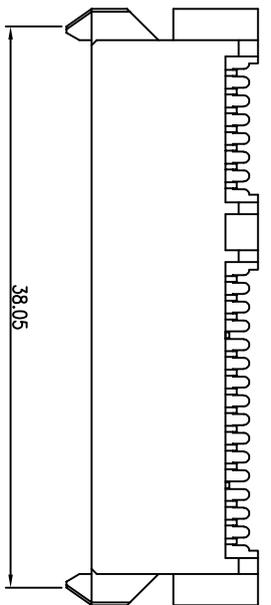
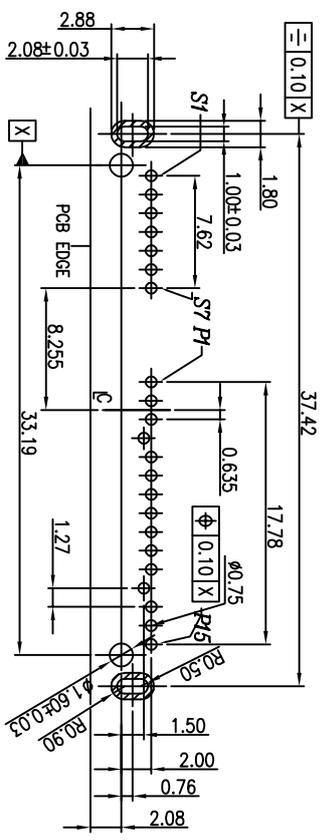
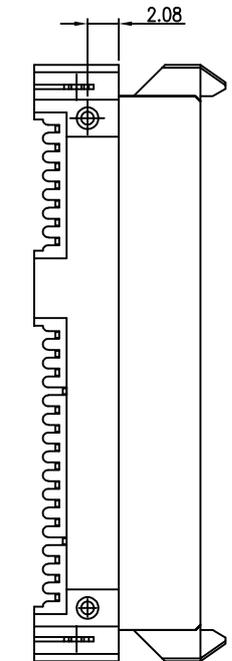


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		




NOTES:
 1. MATERIAL:
 HOUSING: LCP 30% G/F UL94 V-0
 COLOR: BLACK
 CONTACT: PHOSPHOR BRONZE C5191H T=0.25mm
 BOARD LOCK: BRASS C2680H T=0.30mm
 2. FINISH:
 CONTACT: GOLD FLASH/TIN PLATING ON CONTACT AREA
 100u" MIN. TIN PLATING ON SOLDER TAILS
 50u" MIN. NICKEL UNDERPLATING OVER ALL
 BOARD LOCK: 100u" MIN. TIN PLATING ON SOLDER TAILS
 50u" MIN. TIN NICKEL UNDERPLATING OVER ALL

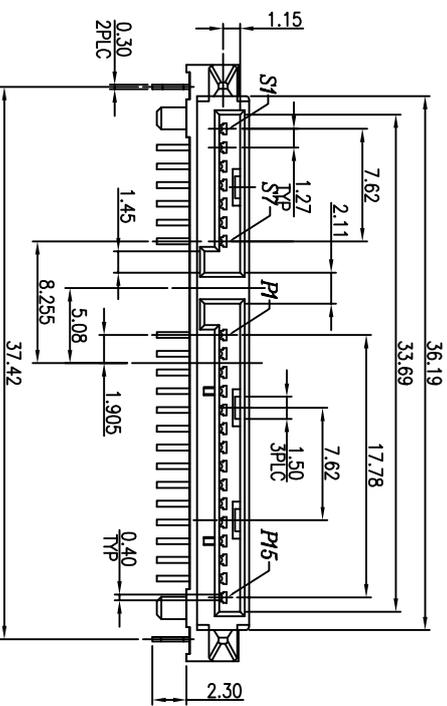

RECOMMEND PCB LAYOUT (Γ=1.2)
 PCB TOLERANCE: ±0.05

EAST-SA90DP S 42LD CR-1

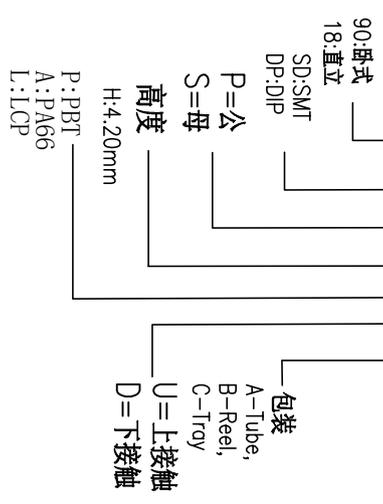

Signal Segment	Name	Type	Power Segment	Name	Type
S1	GND	V3.3	P1	V3.3	P9
S2	A+	V3.3	P2	V3.3	P10
S3	A-	V3.3	P3	V3.3	P11
S4	GND	GND	P4	GND	DAS/DSS
S5	B-	GND	P5	GND	P12
S6	B+	GND	P6	GND	P13
S7	GND	GND	P7	GND	V12
S8	GND	GND	P8	GND	V12

TOLERANCES UNLESS OTHERWISE SPECIFIED:	---	±
X	0.38	
X.X	0.25	
X.XX	0.20	
X.XXX	±3°	Angle

THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dengshengye ELECTRONIC CO., LTD. SHALL NOT BE REPRODUCED.	CUSTOMER COPY	DRAWN: Qinx	CHECKED: Chenl	DATE: 2017/09/10	UNIT: mm	SCALE: N/A	SHEET: 1	REV:
	深圳市东方御业科技有限公司	2017/09/10	2017/09/10	2017/09/10				
	www.dfyycnn.com TEL: 0755-27155560	SATA 7+15P 二合一母座	DIP II: 4.2板下鱼叉侧插					

DO NOT SCALE PRINT