
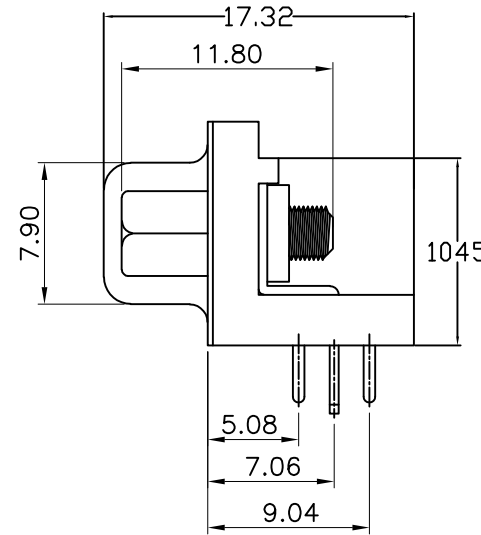


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

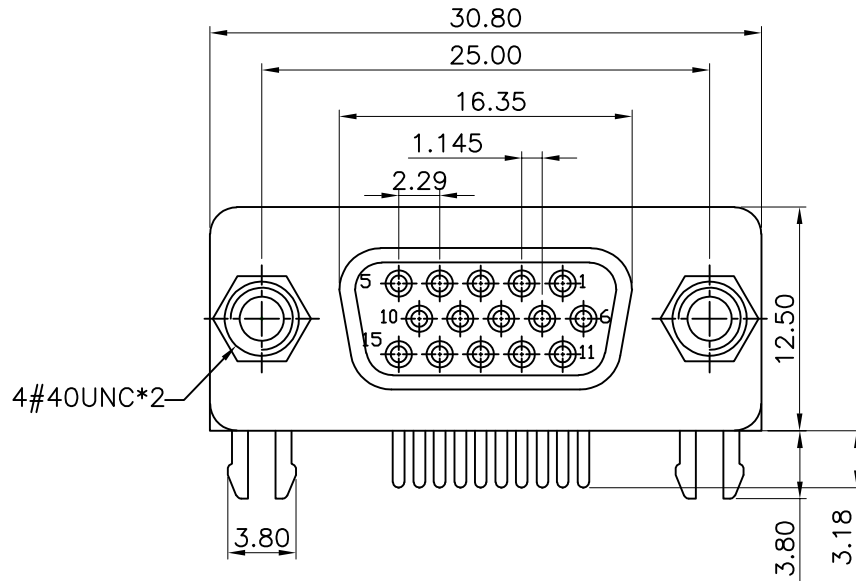

1. MATERIAL&PLATING:

1.1 INSULATOR: LCP, 30%G.F, UL94V-0 COLOR: BLUE
1.2 CONTACT: BRASS,

CONTACT PLATING: GOLD FLASH IN CONTACT AREA,
TIN PLATED IN SOLDER AREA,
NICKEL UNDERPLATED OVERALL.

1.3 SHELL: SPCC, NICKEL PLATED OVERALL.

1.4 BOARD LOCK: SPCC, TIN PLATED IN SOLDER AREA.
NICKEL UNDERPLATED OVERALL.

1.5 SCREW: STEEL, NICKEL PLATED OVERALL.

1.6 RIVET: COPPER ALLOY, NICKEL PLATED OVERALL.

2. SPECIFICATION:

2.1 VOLTAGE RATING: 250V MAX.

2.2 CURRENT RATING: 3.0A MAX.

2.3 CONTACT RESISTANCE: 30mΩ MAX.

2.4 INSULATION RESISTANCE: 3000MΩ MIN.


2.5 DIELECTRIC WITHSTANDING VOLTAGE: 250V PER MINUTE.

2.6 OPERATING TEMPERATURE: -45°C~+85°C


3. NOTES:

3.1 ALL COMPONENTS ARE RoHS2.0 COMPLIANT.

3.2 RESISTANCE TO SOLDERING HEAT: 265°C FOR 5 SECONDS,
AND ONLY FOR WAVE SOLDERING PROCESS.

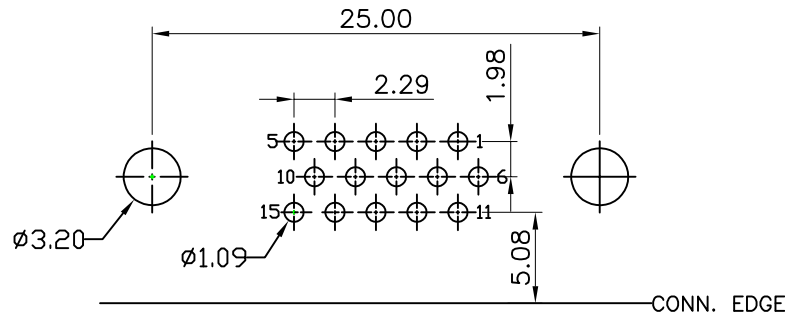

RECOMMENDED P.C.B. LAYOUT(PCB THICKNESS: 1.6mm)
COMPONENT SIDE VIEW(TOLERANCE: ±0.05)

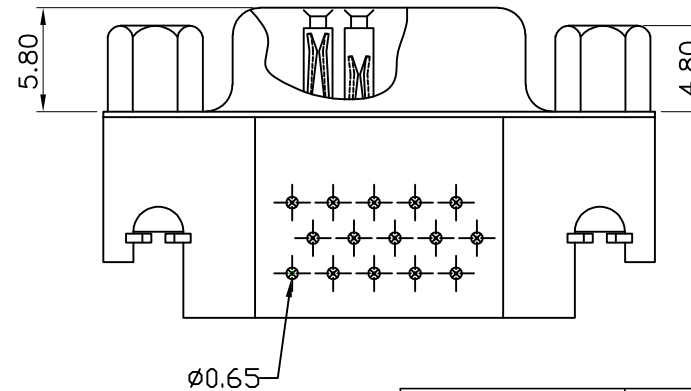

EAST-HDR15P-508XX-X

BK: 黑色
BE: 蓝色

- 1: 锁螺丝 4.8*11.8
2: 无螺丝
3: 附螺丝
4: 锁螺丝 5.8*11.8

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°		CUSTOMER COPY		深圳市东方御业科技有限公司 TEL:0755-27155560 WWW.DFYCONN.COM			
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.		DRAWN: Qinkx	2017/09/10	TITIAL: HDR 15F5.08 铆合 (RoHS)			
		CHECKED: Chenl	2017/09/10	PART NO: EAST-HDR15P-508XX-X			
		APPROVED: Chenl	2017/09/10	UNIT: mm	SCALE: N/A	SHEET: 1	REV.

DO NOT SCALE PRINT.