
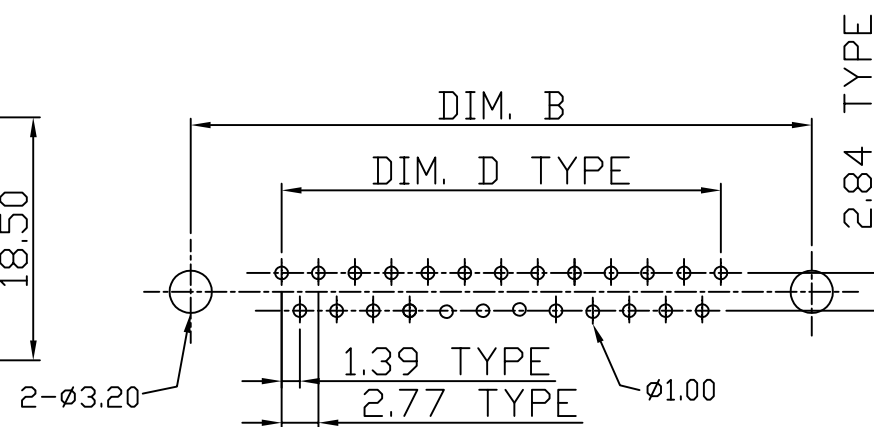

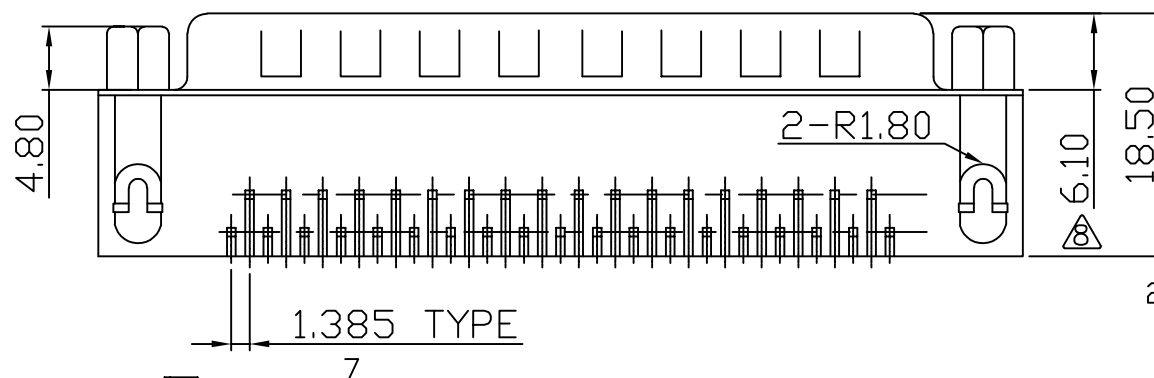


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2013/02/05	Mike

MATERIAL:
 INSULATOR:PBT+30% GLASS FIBER(UL94V-0).
 CONTACT: BRONZE
 CONTACTPLATED:GOLD OVER NICKEL OR TIN
 SHELL:STEEL,nickel
 SPESIFICATION:
 CURRENT RATE:5 AMPS
 INSULATOR RESISTANCE:1000M MIN.AT 500V DC
 DIELECTRIC STRENGTH:1000V PER
 OPERATION TEMPERATURE:-55C TO+105C
 IMPEDANCE:16M FOR 25MHZ
 NOTICE: THE DIMENSION MAKED WITH " * " MUST BE CONTROLLED BY QC.

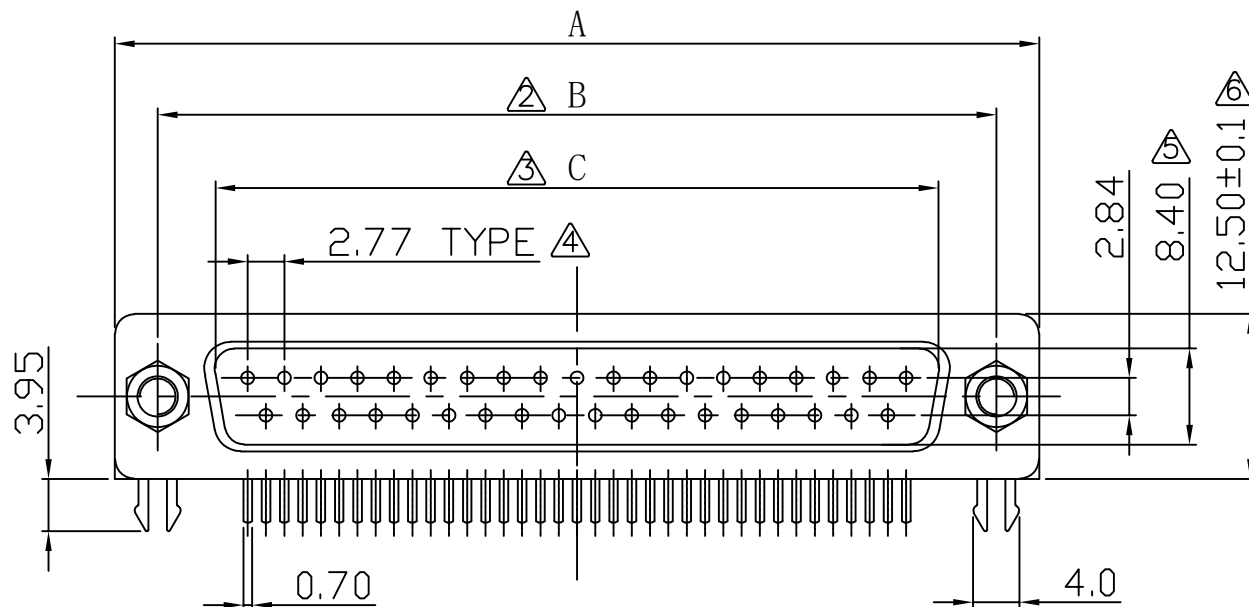

EAST-D-SUB-XXFX808-X

- 螺丝
 1: 锁螺丝 4.8
 2: 无螺丝
 3: 附螺丝
 4: 锁螺丝 5.8
- 塑胶颜色
 B: 黑色
 G: 绿色
 E: 蓝色

POS.	A	B	C
09	30.80	24.99	16.40
15	39.2	33.32	24.80
25	53.10	47.04	38.50
37	70.00	63.50	54.90

RECOMMENDED PC BOARD LAYOUT
 APPLICATIONS: PC BOARD THICKNESS=1.60mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	INSPECTION COPY	深圳市东方御业科技有限公司 www.dfyyconn.com Tel:0755-27155560
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue CO.,LTD. SHALL NOT BE REPRODUCED.	DRAWN: Qinkx CHECKED: Chenlei APPROVED: Chenlei	TITLE: D-SUB 9-37P 铆合锁螺丝 PART NO: EAST-D-SUB-XXFX808-X UNIT: mm SCALE: N/A SHEET: 1/1 REV. A

F

E

D

C

B

A

1

F

E

D

C

B

A

1