

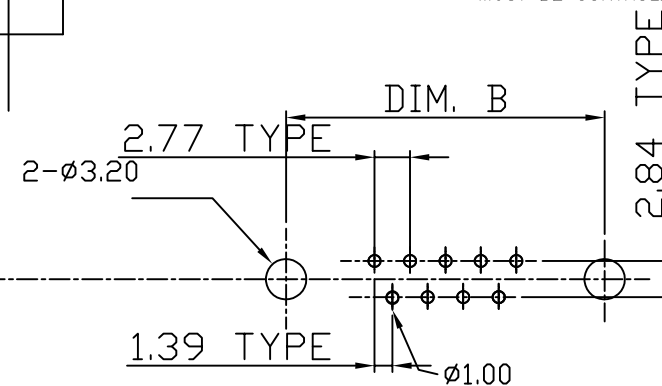
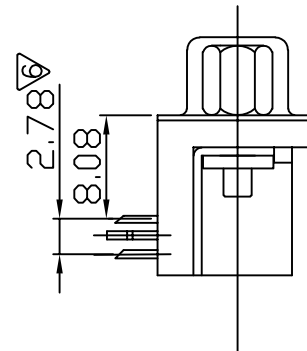


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

MATERIAL:
INSULATOR:PBT+30% GLASS FIBER(UL94V-0).
CONTACT: BRONZE
CONTACPLATED:GOLD OVER NICKELOR TIN
SHELL:STEEL,nickel
SPESIFICATION:
CURRENT RATE:5 AMPS
INSULATOR RESISTANCE:1000M MIN.AT 500V DC
DIELECTRIC STRENGTH:1000V PER
OPERION TEMPERATURE:-55C TO+105C
IMPEDANCE:16M FOR 25MHz
NOTICE: THE DIMENSION MAKED WITH " * "
MUST BE CONTROLLED BY QC.

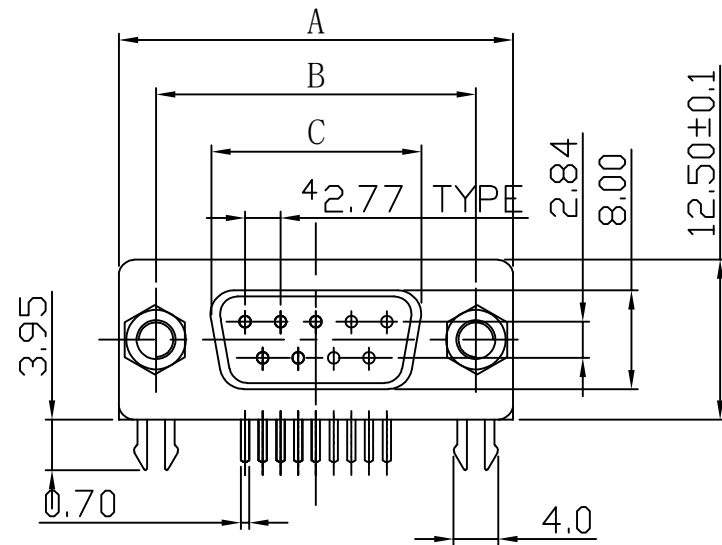

RECOMMENDED PC BORAD LAYOUT
APPLICATIONS: PC BOARD THICKNESS=1.60mm

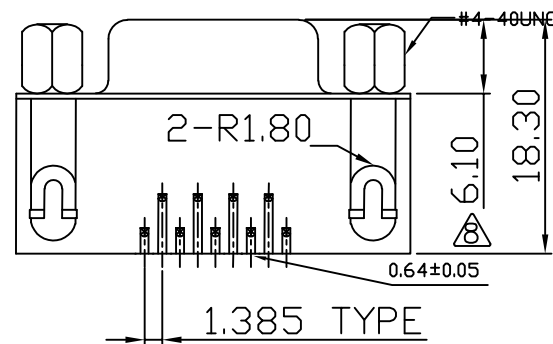

EAST-D-SUB-XXFX808-X

PIN数:

塑胶颜色:

B: 黑色
G: 绿色

螺丝:

1: 锁螺丝4.8*11.8
2: 无螺丝
3: 附螺丝
4: 锁螺丝5.8*11.8

POS.	A	B	C
09	30.80	24.99	16.40
15	39.2	33.32	24.80
25	53.10	47.04	38.50
37	70.00	63.50	54.90

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.10 Angle ±1°		COSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560			
DRAWN: CHENLEI		2017/09/10		TITAL: D-SUB 9-37pin母头90度 8.08mm (RoHS)			
CHECKED: CHENLEI		2017/09/10		PART NO: EAST-D-SUB-XXFX808-X			
APPROVED: QINKAIXING		2017/09/10		UNIT: mm	SCALE: N/A	SHEEL: 1:1	REV.

THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.