
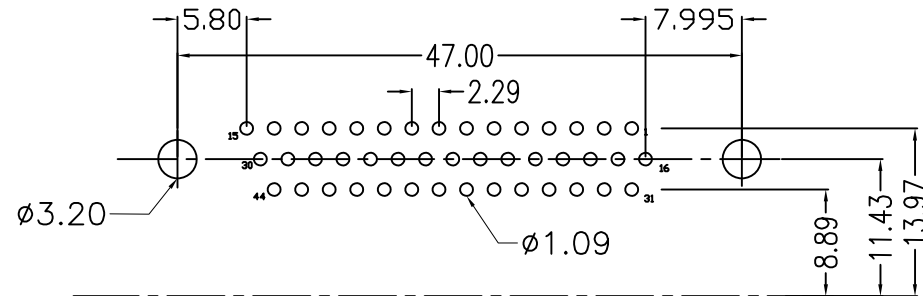
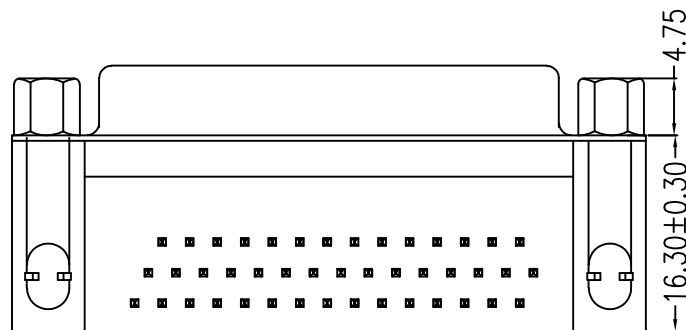
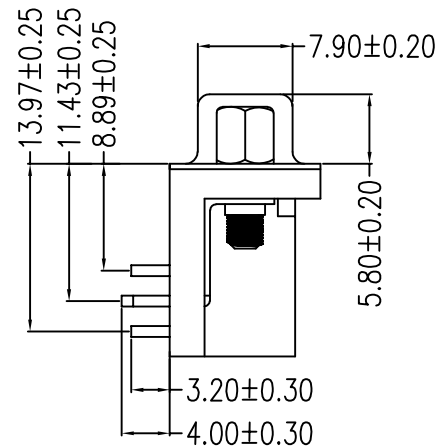


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2013/02/05	Mike

MATERIAL:
 INSULATOR:PBT+30% GLASS FIBER(UL94V-0).
 CONTACT: BRONZE
 CONTACT PLATED:GOLD OVER NICKEL OR TIN
 SHELL:STEEL,nickel
 SPECIFICATION:
 CURRENT RATE:5 AMPS
 INSULATOR RESISTANCE:1000M MIN.AT 500V DC
 DIELECTRIC STRENGTH:1000V PER
 OPERATION TEMPERATURE:-55C TO+105C
 IMPEDANCE:16M FOR 25MHZ
 NOTICE: THE DIMENSION MADE WITH " * "
 MUST BE CONTROLLED BY QC.

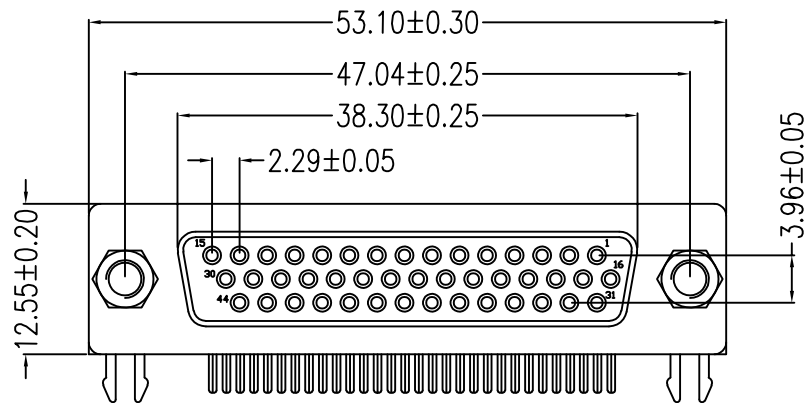

P.C.B. PLYOUT

EAST-D-SUB-44RB808-1

螺丝:
 1: 锁螺丝 4.8
 2: 无螺丝
 3: 附螺丝
 4: 锁螺丝 5.8

塑胶颜色:
 B: 黑色

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°		INSPECTION COPY		深圳市东方御业科技有限公司 www.dfyyconn.com Tel:0755-27155560	
DRAWN: Qinkx		2013/02/05		TITIAL: D-SUB 44P母头8.08mm直锁螺丝	
CHECKED: Chenlei		2013/02/05		PART NO: EAST-D-SUB-44RB808-1	
APPROVED: Chenlei		2013/02/05		UNIT: mm	SCALE: N/A
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue CO.,LTD. SHALL NOT BE REPRODUCED.				SHEET: 1/1	REV. A

A

B

C

D

E

F