
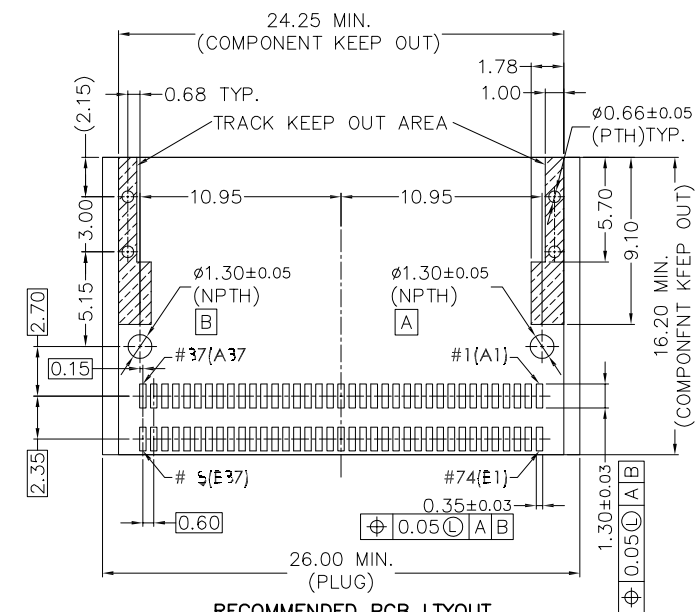
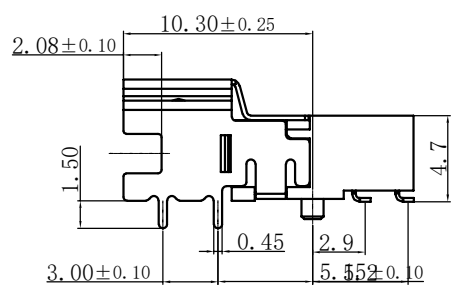
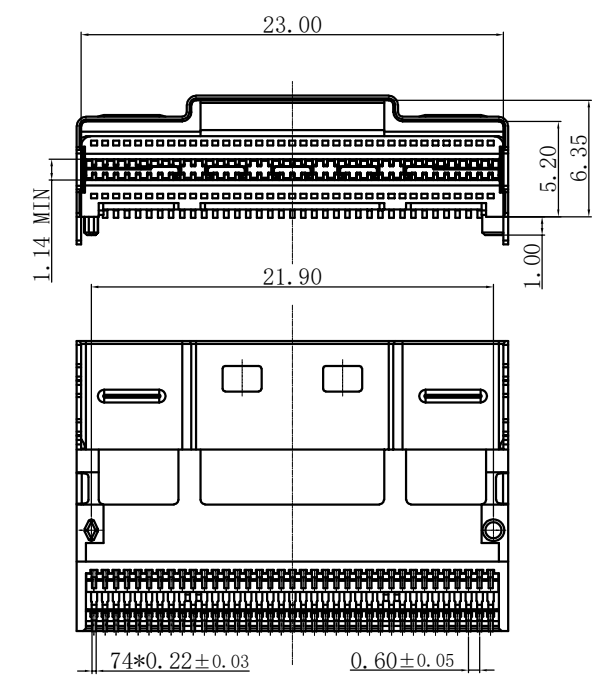
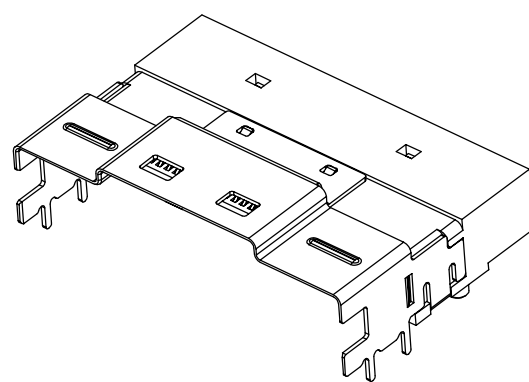


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

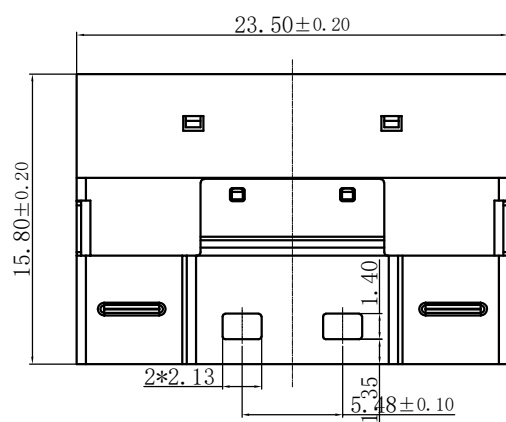

RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05



NOTES:

1. MATERIAL:
HOUSING: SOLDER REFLOW PROCESS COMPATIBLE LCP, BLACK, UL 94V-0
CONTACTS: HIGH PERFORMACE COPPER ALLOY, PLATING REFER TO P/N SYSTEM
LATCH: STAINLESS STEEL, SOLDERABLE NICKEL OVERALL
2. RoHS COMPLIANT
The product using material and processing must conform to the "WI-PZ-142 "HSF technical standard control requirements

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°		COSTOMER COPY		深圳市东方御业科技有限公司 www.dfyyconn.com TEL:0755-27155560	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.		DRAWN: Qinx	2017/09/10	TITAL: Slim SAS 8X R/A SMT Type (RoHS)	
		CHECKED: Chenl	2017/09/10	PART NO: EAST-SFF8654B2A1CR	
		APPROVED: Chenl	2017/09/10	UNIT: mm	SCALE: N/A
				SHEET: 1/1	REV. A

www.dfyyconn.com

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

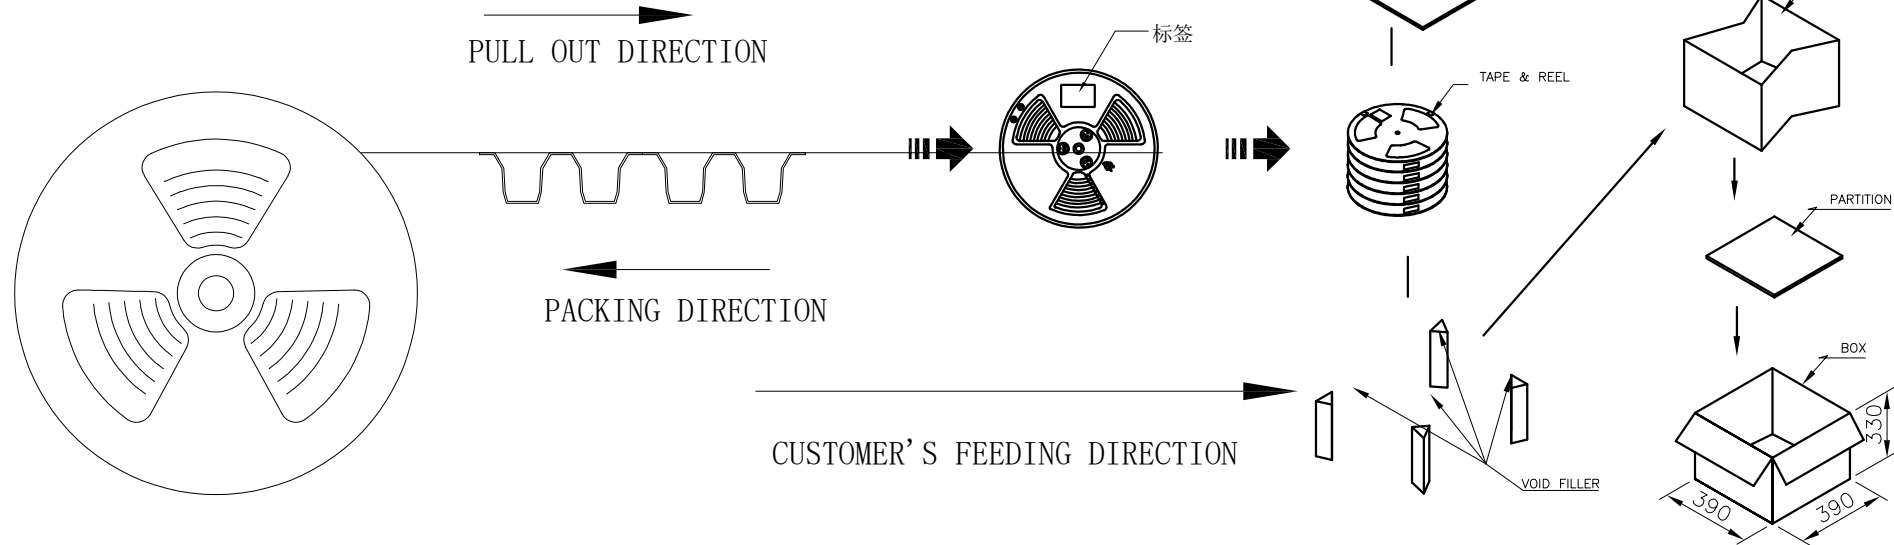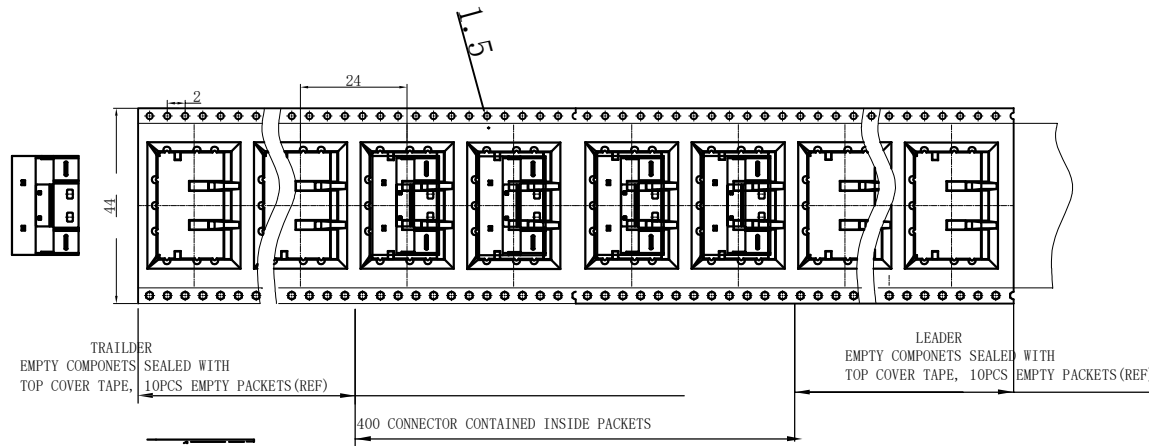

- NOTE:
1. PEELING SPEED: 300mm/MINUTE
(剥離速度: 300mm/分)
 2. PEELING RESISTANCE: 30g~100g
(剥離力: 30~100g)
 3. PEELING ANGLE: 165° ~ 180°
(剥離角度: 165~180°)
 4. QUANTITY: (數量:)
400 PCS/REEL (400個/卷)
6 BOXES/CARTON (6盒/箱)
2400 PCS/CARTON (2400個/箱)

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°		COSTOMER COPY		深圳市东方御业科技有限公司 www.dfyyconn.com TEL:0755-27155560	
DRAWN: Qinx		2017/09/10		TITAL: Slim SAS 8X R/A SMT Type (RoHS)	
CHECKED: Chenl		2017/09/10		PART NO: EAST-SFF8654B2A1CR	
APPROVED: Chenl		2017/09/10		UNIT: mm	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.		SCALE: N/A		SHEET: 1/1	
				REV: A	