

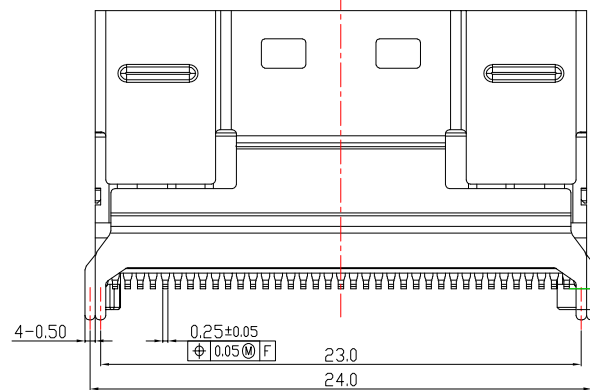
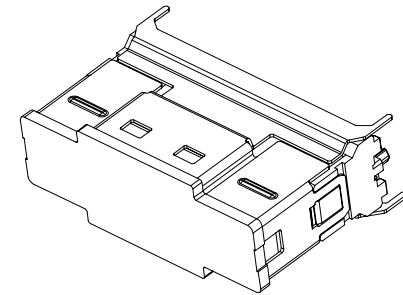
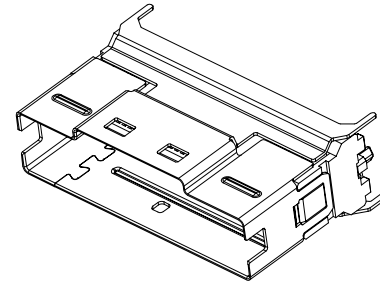
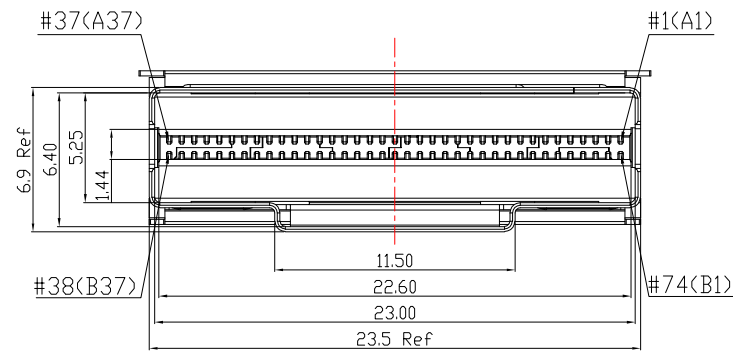
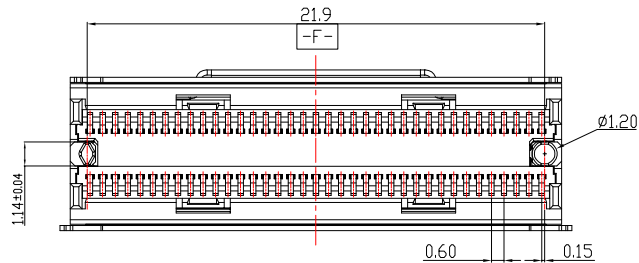


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

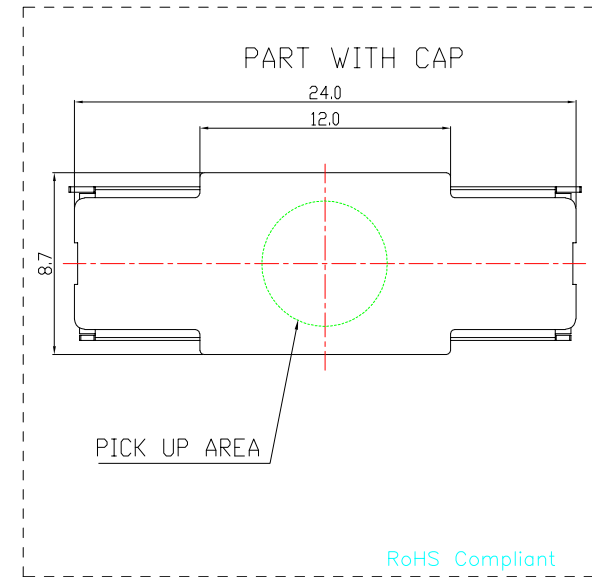


0.10
ALL SMT
TAILS

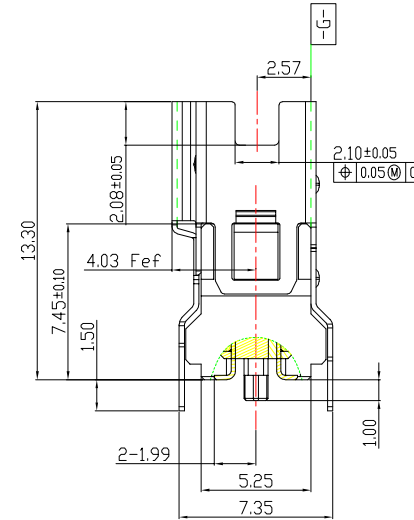


TOLERANCES UNLESS OTHERWISE SPECIFIED: X. — X. X ± 0.38 X. XX ± 0.25 X. XXX ± 0.10 Angle ± 1°		CUSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560	
DRAWN: CHENLEI		2017/09/10		TITIAL: Slim SAS 8X VT SMT Type (RoHS)	
CHECKED: CHENLEI		2017/09/10		PART NO: EAST-SFF8654A1CR	
APPROVED: QINKAIXING		2017/09/10		UNIT: mm	SCALE: N/A
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.				SHEET: 1:1	REV.

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

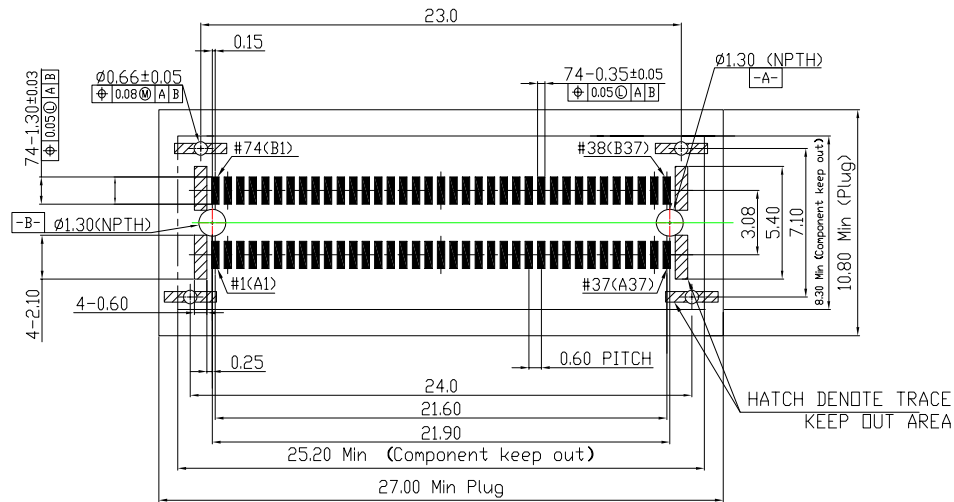

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

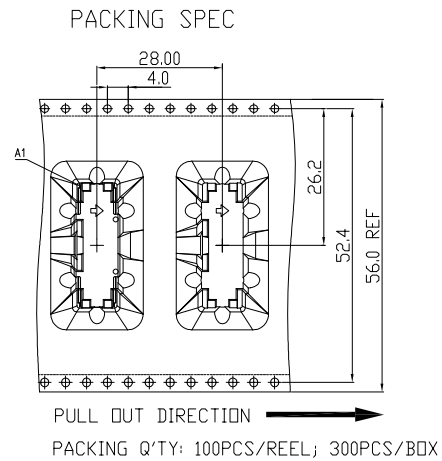

SPECIFICATIONS:

1. Material And Finish:

Insulator: High Temperature Thermoplastic UL94 V-0, Black.

Contact: Copper Alloy.

Gold Plated Over Nickel Plated On Mating Area.

Matte Tin Plated Over Nickel On Solder Area.

Latch: Stainless Steel.

Nickel Plated Overall.

2. Electrical Specification

. Contact Resistance: 20m Ohms Max.

. Insulation Resistance: 1000M Ohms Min. At 100V DC For 60 Seconds.

. Withstanding Voltage: 300V Min. DC For 60 Seconds.

. Voltage Rating: 30V AC.

. Current Rating: 0.5A Per Pin.

3. Mechanical Specification

. Latch Retention Force: 50N Min.

. Mating Force: 40N Max.

. Unmating Force: 30N Max.

. Durability: 250 Cycles.

4. Environmental Specification

. Operating Temperature: -40° ~ +85°C.

. Temperature Rise: 30°C Max.

5.

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X. X ± 0.38 X. XX ± 0.25 X. XXX ± 0.10 Angle ±1°		CUSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560		
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.		DRAWN: CHENLEI	2017/09/10	TITIAL: Slim SAS 8X VT SMT Type	(RoHS)	
		CHECKED: CHENLEI	2017/09/10	PART NO: EAST-SFF8654A1CR		
		APPROVED: QINKAIXING	2017/09/10	UNIT: mm	SCALE: N/A	SHEET: 1:1