

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

RoHS
Compliant

NOTE:

1.MATERIAL:

HOUSING: LCP 30% G/F UL 94V-0 ;BLACK
COVER: LCP 30% G/F UL 94V-0 ;BLACK
CONTACT(1.27): C5191R-H,T=0.30±0.01mm
CONTACT(0.8): C5191R-H,T=0.25±0.01mm
PEG: C2680R-H,T=0.30±0.01mm

2.MECHANICAL:

MATING: 25N MAX.
WITHDRAWAL FORCE: 5N MIN.
DURABILITY: 500 CYCLES.

3.ELECTRICAL:

CURRENT RATING: 1.5 A
CONTACT RESISTANCE:30 Milliohms MAX.
INSULATION RESISTANCE: 1000 Megohms MIN.
WITHSTANDING VOLTAGE: 500 VAC

4.FINISH:





CONTACT: 1u" GOLD MIN. PLATING ON CONTACT AREA
100u"MIN. TIN PLATING ON SOLDER TAILS
50u" MIN. NICKEL UNDERPLATING OVER ALL
PEG:100u" MIN. TIN PLATING ON SOLDER AREA
50u" MIN.NICKEL UNDERPLATING OVER ALL

5.ENVIRONMENTAL:

OPERATURE RANGE:-25°C TO +85°C

EAST-SAS2918 DP S 17L0CR

包装方式:
A: 管
B: 卷盘
C: 吸塑盘
SD: SMT
DP: DIP
P: 公座
S: 母座
端子脚长DIM A:
16: 2.50mm
17: 3.00mm

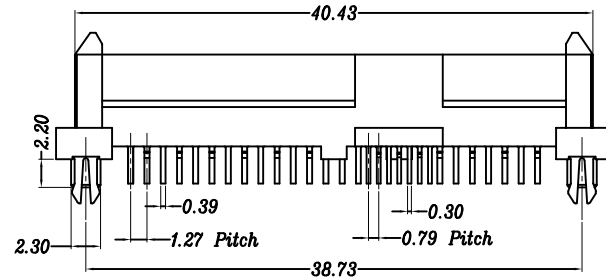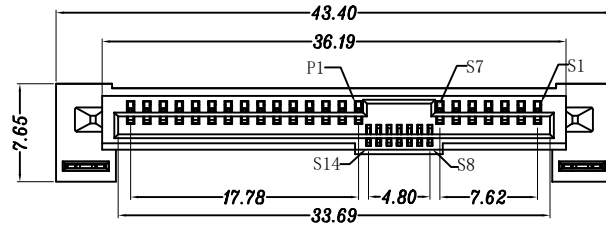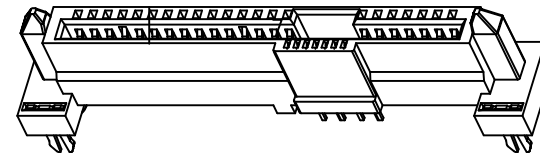

RECOMMENDED P.C.B LAYOUT

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°		COSTOMER COPY DRAWN: Qinkx CHECKED: Chenl APPROVED: Chenl		深圳市东方御业科技有限公司 www.dfyyconn.com Tel:0755-27155560	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.		2017/09/10		TITAL: SAS 29P直立式180度四排针DIP (RoHS)	
		2017/09/10		PART NO: EAST-SAS2918DPS16L0CR	
		2017/09/10		UNIT: mm	
				SCALE: N/A	
				SHEEL: REV.	