
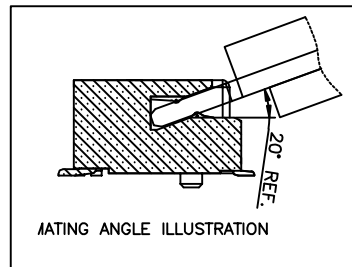
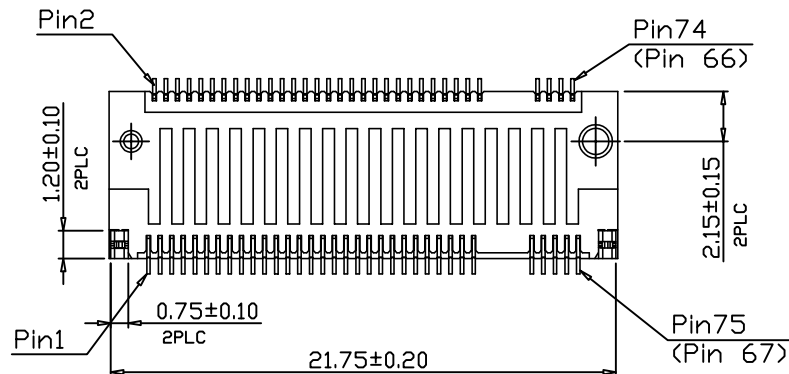
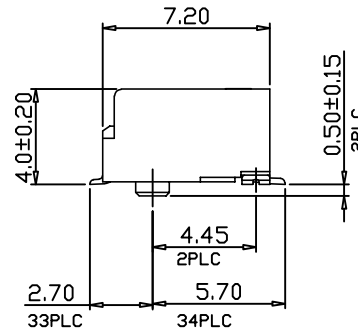
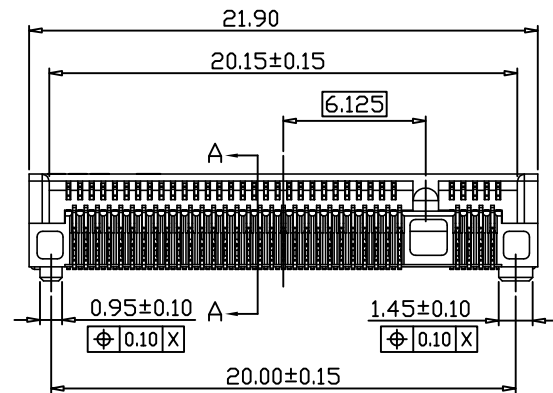



REV	LTR	DESCRIPTION	DATE	DWN
-----	-----	-------------	------	-----

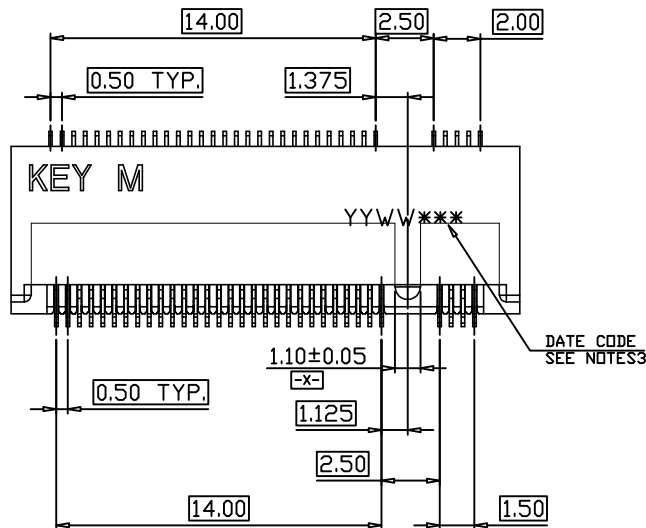

- HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL94V-0, COLOR: BLACK
- CONTACT: PHOSPHOR BRONZE.
- SOLDER PEG: STAINLESS STEEL.
- FINISH:
 - CONTACT: UNDERPLATING NICKEL 50u" MIN OVERALL, GF PLATING ON SOLDER AREA. CONTACT AREA: SEE TABLE,
 - SOLDER PEG: MATTE TIN 100u" MIN. AND NICKEL 50u" MIN UNDER PLATED.
- DATE CODE: YYWW***
 - YY: YEAR (09: 2009)
 - WW: WEEK (25: THE 25TH WEEK)
 - *: DAY (1~7: SUNDAY~SATURDAY)
 - *: LINE NUMBER OF ASSEMBLY (A: LINE A)
 - *: D OR N (D: DAY; N: NIGHT)
- CONNECTOR ACTUAL PIN QUANTITY IS 67, AS THE KEY TAKING OUT 8 PINS.

CHNEAST INFORMATION:

EAST-067 40 X 25 K1 B R

No. of Pins

Plating:

A-Flash Gold (0.8u" Min)
B-Gold 3u" Au
C-Gold 5u" Au
D-Gold 10u" Au
E-Gold 15u" Au
G-Gold 30u" Au

Environment Protection:

R for RoHS

Packing:

B-Tape & Reel

HSG Color:

K1: Black

TOLERANCE		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL: 0755-27155560	TITLE: NGFF(M.2) 4.0H KEY-M Connector			
LINEAR	ANGLES		CUSTOMER COPY			
X.±0.50	X°.±2.0°		PART NO.: EAST-06740-25		DWG NO.: EAST-06740-25	
.X.±0.38	.X°.±1.0°		UNITS		SCALE	
.XX.±0.25	.XX°.±	APPD:	MM		1 OF 2	
.XXX.±0.15	.XXX°.±	CHKD:	DATE: 2016-9-29		SHEET	
			1 OF 2		REV	
			A/0			

