

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

NOTES:

1.ELECTCAL CHARACTERISTICS:


- 1-1.CONTACT CURRENT RATING: 7.5A.
- 1-2.CONTACT VOLTAGE RATING: 30V. DC.
- 1-3.CONTACT RESISTANCE: 30mΩ MAX.
- 1-4.DIELECTRIC WITHSTANDING VOLTAGE: 500V. AC. for 1 MINUTE
- 1-5.INSULATION RESISTANCE: 1000 MΩ MIN.AT 500V. DC

2.MECHANICAL CHARACTERISTICS:

- 2-1.DURABILITY: 1000 CYCLES.
- 2-2.INSERTION AND EXTRACTION FORCE:
 - 2-2.1.INSERTION FORCE: 45N MAX.
 - 2-2.2.EXTRACTION FORCE: 4.9N~29.4N

3.ENVIRENMENT CHARACTERISTICS:



- 3-1.OPERATING TEMPERATURE.-25℃~+85℃
- 3-2.HUMIDTY:45-85% RH.

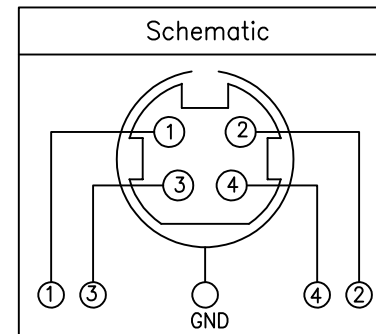

EAST-411R2-1X

颜色:
G:绿色
P:紫色
B:黑色

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X. X ± 0.38 X. XX ± 0.25 X. XXX ± 0.10 Angle ±1°		COSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560	
DRAWN: CHENLEI		2017/09/10		TITIAL: MINI DIN SOCKET (RoHS)	
CHECKED: CHENLEI		2017/09/10		PART NO: EAST-411R2-1X	
APPROVED: QINKAIXING		2017/09/10		UNIT: mm	SCALE: N/A
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.				SHEET: 1:1	REV.

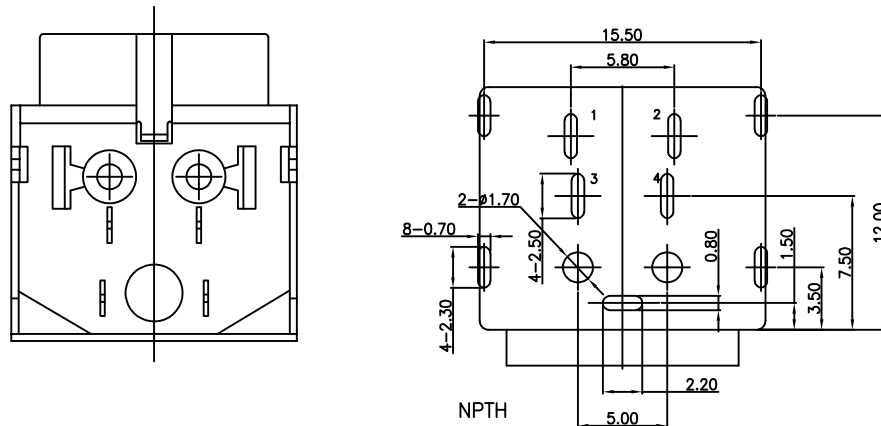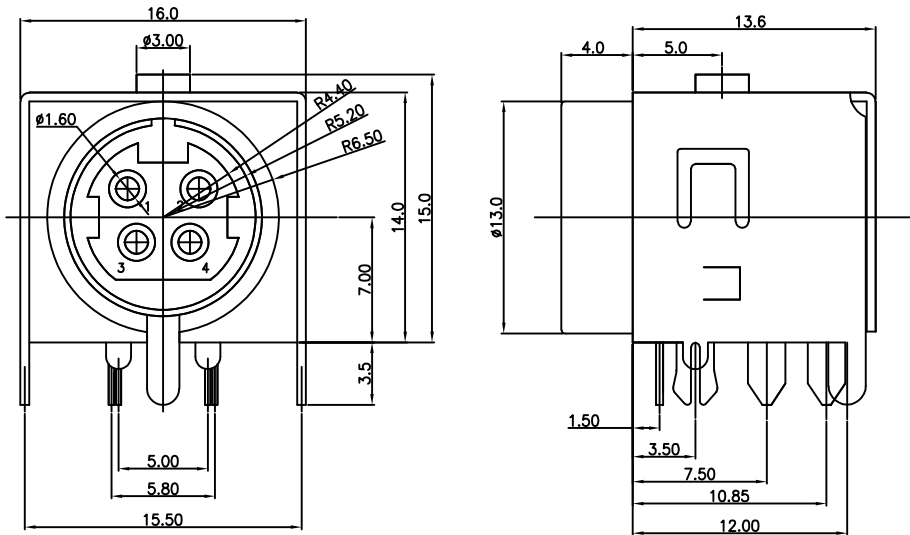

RECOMMENDED P.C.B LAYOUT
TOP VIEW TOLERANCE:±0.05mm