


REV	LTR	DESCRIPTION	DATE	DWN
-----	-----	-------------	------	-----

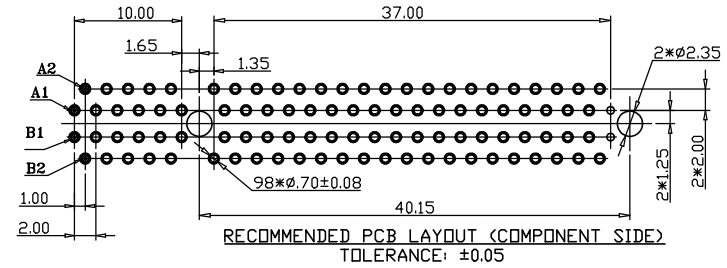

*Material:

- 1.Housing: LCP+30%G/F,UL94 V-0, Color:Black;
- 2.Terminal: Brass,T=0.25mm;
- Plating: Gold in contact area;
80u" Min Tin in solder area;
30u" MIN.NICKEL UNDERPLATING OVER ALL.

*Electrical Characteristics:

- 1:Contact Resistance: 30mΩ Max.
- 2:Insulation Resistance: 1000MΩ Min.
- 3:Dielectric Strength: 500V DC/1MIN.
- 4.Contact Current rating: 1.1 A Per Pin Min.

*Mechanical Characteristics:

- 1:Insertion Force: 1.15N per contact pair Max.
- 2:Extraction Force: 0.15N per contact pair Min.
- 3.Durability rating: 50 Cycles

ORDER INFORMATION:

EAST-098 01 A 22 K1 C X

No. of Pins

Plating:

A-Flash:Gold in contact area/
80u" Min Tin in solder area.
B-3u" Min:Gold in contact area/
80u" Min Tin in solder area.
C-5u" Min:Gold in contact area/
80u" Min Tin in solder area.
D-10u" Min:Gold in contact area/
80u" Min Tin in solder area.
E-15u" Min:Gold in contact area/
80u" Min Tin in solder area.

Environment
Protection:









R for RoHS
G for GP
H for Halogen-free

Packing:

A-Tube, C-Tray, E-Box

HSG Color:

K1:Black, L1:White

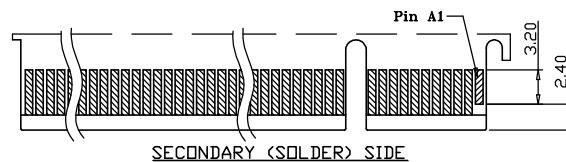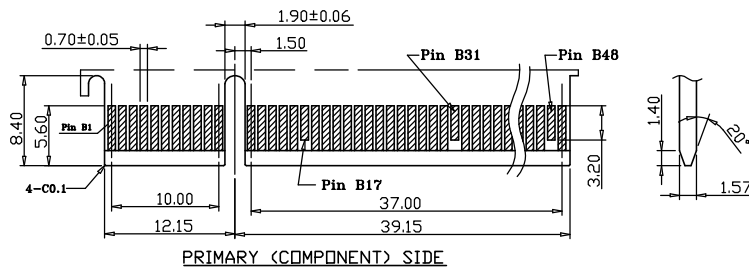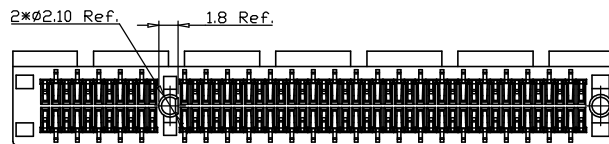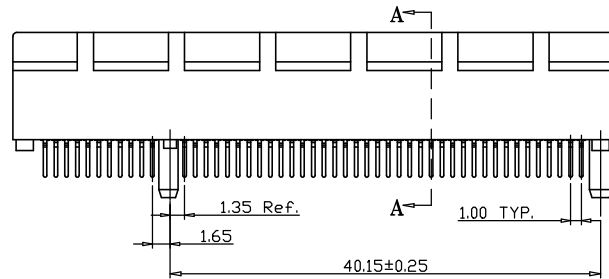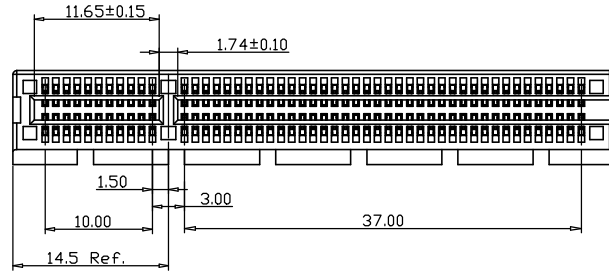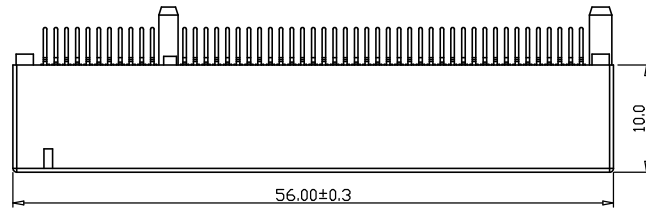

TOLERANCE		深圳市东方御业科技有限公司 Tel:0755-27155560 WWW.DFYCONN.COM	TITLE: PCIe 98Pin 开口导柱式DIP型			
LINEAR	ANGLES		CUSTOMER COPY	PART NO.:	SEE TABLE	
X.±0.50	X°.±2.0°			DWG NO.:	EAST-09801-22	
.X±0.38	.X°±1.0°			UNITS	SCALE	SHEET
.XX±0.25	.XX°±	APPD:	DRWN: Rocky	MM	1:1	1 OF 1
.XXX±0.10	.XXX°±	CHKD:	DATE: 2018-11-17			A/0