



REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		


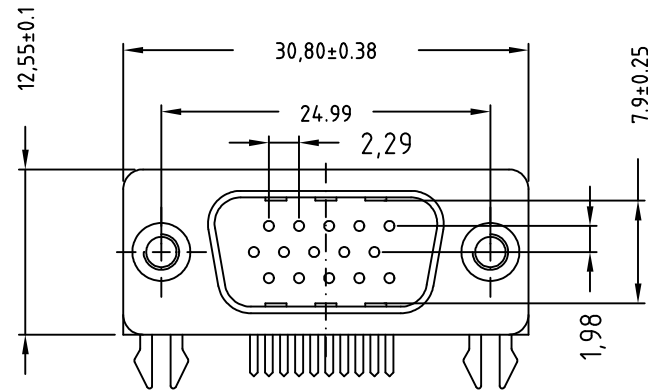


一、MATERIAL:

- 1.Insulator:PBT+30%Glass Fiber (UL94V-0)
- 2.Contact:Brass
- 3.Contact Plated:Glod Flash over Tin Or Glod Plated Or Tin Plated
- 4.Shell:Stell,Nickel Plated

二、SPECIFICATION:


- 1.Current Rating:5 AMPS
- 2.Insulation Resistance: 1000MΩ MIN. At 500VDC
- 3.Dielectric Strength: 500V for One minute
- 4.Operation Temperature: -55° C~+105° C.

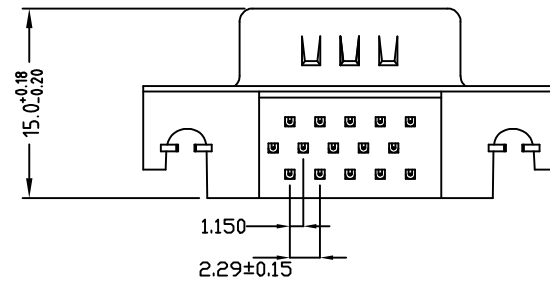

EAST-HDF15P-308XX-X

Pin数: 15:15P
 塑胶颜色: BK: 黑色
 BE: 蓝色

螺丝:
 1:锁螺丝4.8
 2:无螺丝
 3:附螺丝4.8
 4:锁螺丝5.8
 5:附螺丝5.8

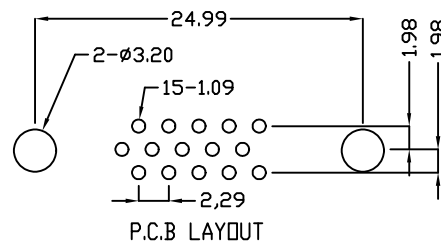

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X. X ± 0.38 X. XX ± 0.25 X. XXX ± 0.20 Angle ± 3°	COSTOMER COPY		深圳市东方御业科技有限公司 www.dfyyconn.com Tel:075527155560			
	DRAWN:	Qinkx	2017/09/10	TITAL: HDR-15P公头3.08mm铆合式		
	CHECKED:	Chenl	2017/09/10	PART NO: EAST-HDF15P-308XX-X		
	APPROVED:	Chenl	2017/09/10	UNIT: mm	SCALE: N/A	SHEEL: REV.

THESE DRAWING AND SPICIFATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.