
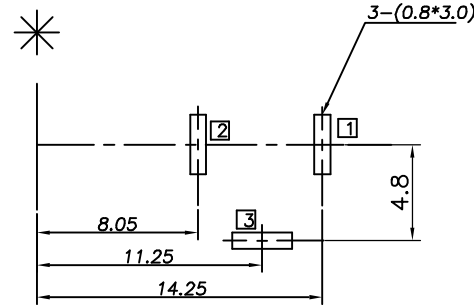
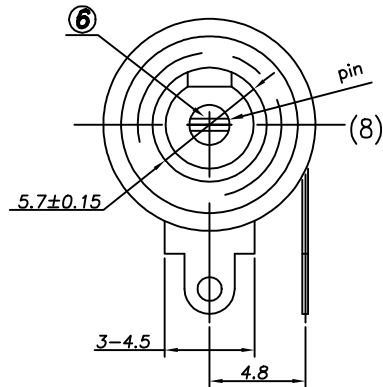
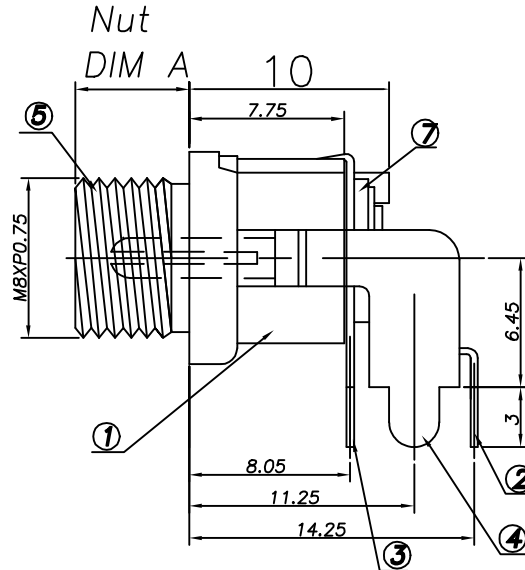


Washer

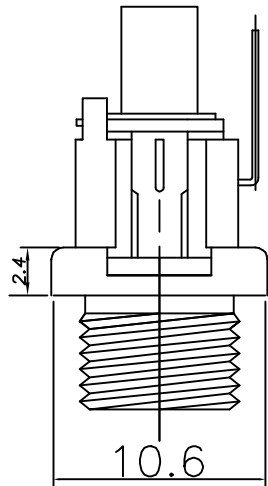


RECOMMEND PCB LAYOUT (TOP VIEW)
TOLERANCE:±0.05

REV.	ECN NO.	MODIFY	MATTER	DATE	APPROVED
A			RELEASE TO PRODUCTION		

SPECIFICATION

1. Rated Load : 30V 3A;
2. Contact resistance: $\leq 30m\Omega$;
3. Insulation resistance: $\geq 100M\Omega$;
4. Withstand voltage: AC500V;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.

RoHS
Compliant

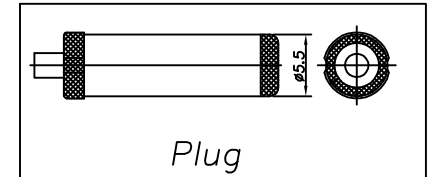

Plug

CAT NO.	PIN	SCHEMATIC
EAST-D026M-X.X-2.0	2.0	1
EAST-D026M-X.X-2.5	2.5	2
X.X 代表螺纹长度		DIM A=5.7/8.5mm

9	WASHER	1	STEEL T=0.3	—	MB:Cu Ni PLATED
8	NUT	1	BRASS T=2.1	—	MB:Cu Ni PLATED
7	HOUSING	1	PBT 4815	—	UL-94V0(BLACK)
6	INSULATOR	1	PF	—	—
5	AXIS SUPPORT	1	C2680	—	MB:Cu Ni PLATED
4	PIN	1	C2680	—	MB:Cu Ni PLATED
3	SHUNT TERMIALN	1	C5191	—	MB:Cu Sn PLATED
2	TIP SPRING	1	C2680	—	MB:Cu Sn PLATED
1	CENTER PIN TERMINAL	1	C2680	—	MB:Cu Sn PLATED

NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
TOLERANCES UNLESS OTHERWISE SPECIFIED:			COSTOMER COPY		
X. —			深圳市东方御业科技有限公司		
X.X ± 0.38			www.dfyyconn.com TEL:0755-27155560		
X.XX ± 0.25			DRAWN: Qinkx 2017/09/10		
X.XXX ± 0.20			CHECKED: Chenl 2017/09/10		
Angle ± 3°			APPROVED: Chenl 2017/09/10		
THESE DRAWING AND SPOIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyuye ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.			TITIAL: DC JACK带螺纹 (RoHS)		
			PART NO: EAST-D026M-X.X-X.X		
			UNIT: mm		
			SCALE: N/A		
			SHEEL: REV.		