

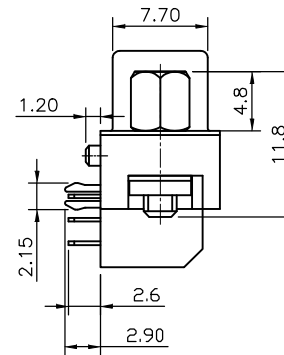
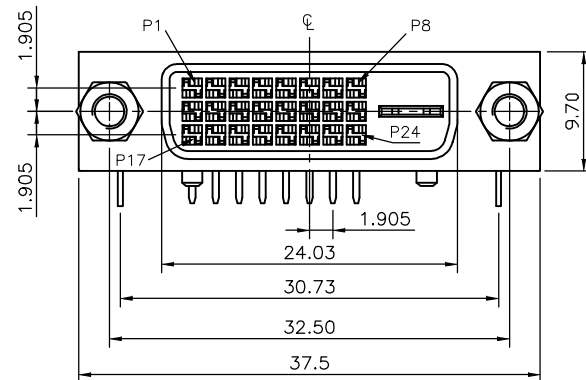


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

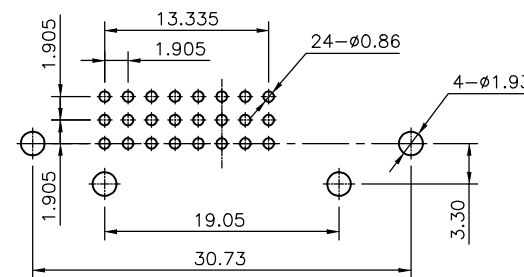

- MATERIAL
 - HOUSING AND COVER: PBT+30%G.F (UL94V-0) COLOR: WHITE.
 - TERMINAL: COPPER ALLOY, GOLD FLASH IN CONTACT AREA, 60u" MIN. MATTE TIN PLATED IN SOLDER AREA, 30u" MIN NICKEL UNDERPLATED OVERALL.
 - SHELL:SPCC, NICKEL PLATED OVERALL.
 - BOARD LOCK: SPCC, TIN PLATED OVERALL.
 - RIVET: COPPER ALLOY, NICKEL PLATED OVERALL.
 - SCREW: STEEL, NICKEL PLATED OVERALL.
- SPECIFICATION
 - CURRENT RATE: 1.5 AMPS.
 - CONTACT RESISTANCE: 30mΩ MAX.
 - INSULATOR RESISTANCE: 1000MΩ AT 500V DC.
 - DIELECTRIC STRENGTH: 500V AC PER MINUTE.
 - OPERATION TEMPERATURE: -20°C TO +80°C.
- NOTES:
 - ALL COMPONENTS ARE RoHS COMPLIANT.
 - RESISTANCE TO SOLDERING HEAT: 265°C FOR 5 SECONDS, AND ONLY FOR WAVE SOLDERING PROCESS.

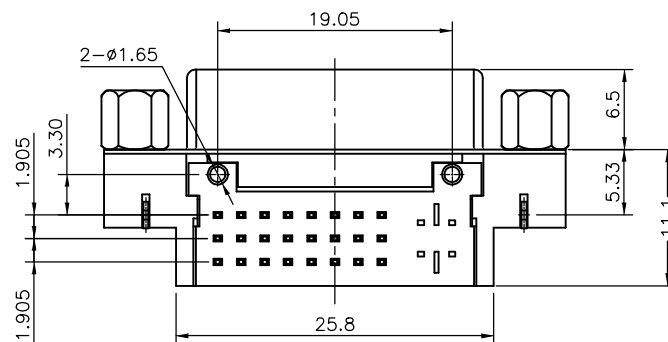

RECOMMENDED P.C.B. LAYOUT(PCB THICKNESS: 1.6mm)
COMPONENT SIDE VIEW(TOLERANCE: ±0.05)

EAST-DVID24PX11XR

塑胶颜色: W:白色 B:黑色
螺丝:
1:锁螺丝4.8
2:无螺丝
3:附螺丝
4:锁螺丝5.8

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°		COSTOMER COPY		深圳市东方御业科技有限公司 www.dfyyconn.com TEL:0755-27155560	
DRAWN: Qinkx		2017/09/10		TITIAL: DVI-2 24+1P无屏蔽外壳 (RoHS)	
CHECKED: Chenl		2017/09/10		PART NO: EAST-DVID24PX11XR	
APPROVED: Chenl		2017/09/10		UNIT: mm	SCALE: N/A

THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.