

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

NOTES:

1. MATERIAL

- 1.1 HOUSING: PBT+30%G.F (UL94V-0) COLOR: WHITE
COVER: PBT+30%G.F (UL94V-0) COLOR: WHITE
- 1.2 TERMINAL: BRASS, GOLD FLASH ON CONTACT,
TIN PLATED ON TAIL 60u", OVER NICKEL PLATED 30u"
- 1.3 SHELL: SPCC, NICKEL PLATED.
- 1.4 BOARD LOCK: SPCC, TIN PLATED.
- 1.5 RIVET: BRASS, NICKEL PLATED.
- 1.6 SCREW: BRASS, NICKEL PLATED.


2. SPECIFICATION

- 2.1 Current Rate: 1.5 Amps
- 2.2 Contact Resistance: 30m Ohms Ω_{max}
- 2.3 Insulator Resistance: 1000M Min. at 500V DC
- 2.4 Dielectric Strength: 500V AC Per minute
- 2.5 Operation Temperature: -20° C to +80° C
- 2.6 KEY SIZES "▲"

EAST-DVID24PX33XR

- 颜色: 1: 锁螺丝4.8
W: 白色 2: 无螺丝
B: 黑色 3: 附螺丝
4: 锁螺丝5.8

RECOMMENDED P.C.B LAYOUT(PCB THICKNESS: 1.6mm)
COMPONENT SIDE VIEW(TOLERANCE: ±0.05)

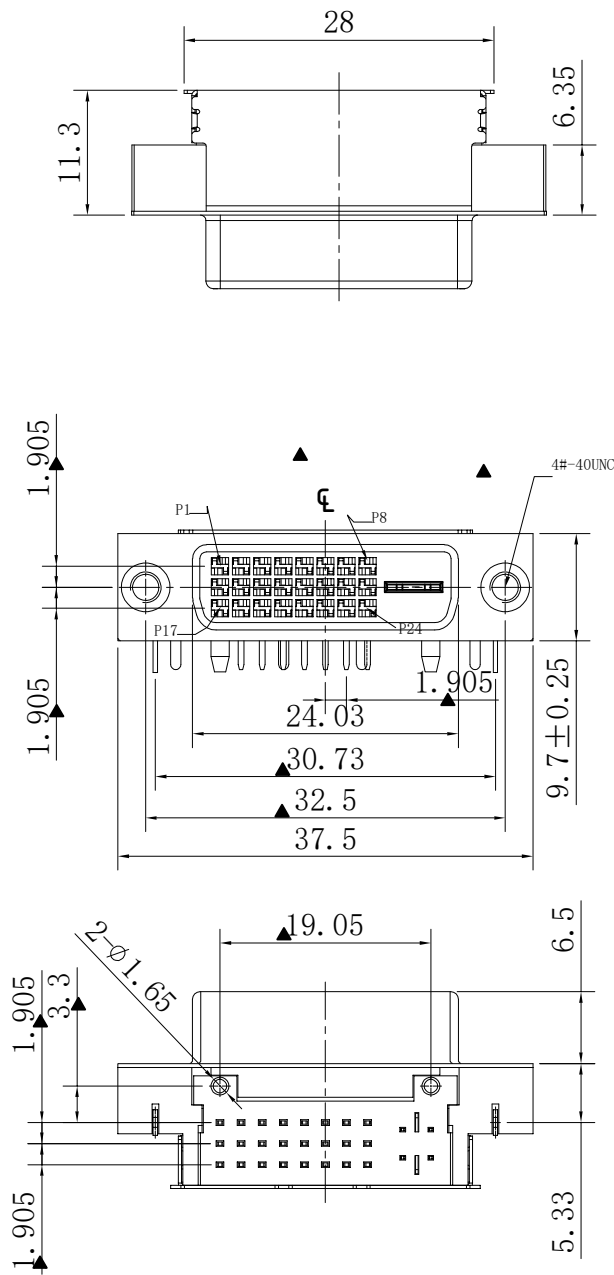

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°		COSTOMER COPY DRAWN: Qinkx CHECKED: Chenl APPROVED: Chenl		深圳市东方御业科技有限公司 TEL: 0755-27155560 WWW.DFYCONN.COM	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.		2017/09/10		TITIAL: DVI-D 24+1P全屏蔽外壳带外壳后脚 (RoHS)	
		2017/09/10		PART NO: EAST-DVID24PX33XR	
		2017/09/10		UNIT: mm SCALE: N/A SHEEL: REV.	