



REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

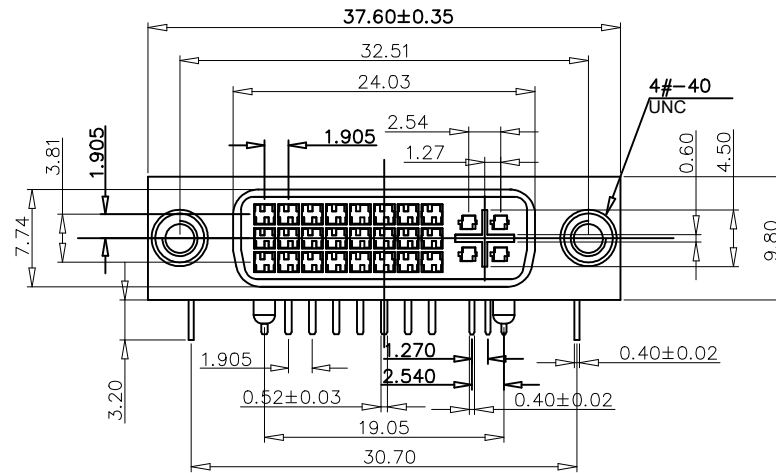

*MATERIAL

BODY: PBT30% UL 94V-0 RATED, COLOR: SEE PART NO.:
LATCH: PA66+30% UL 94V-0 RATED,COLOR:SEE PART NO.:
CONTACTS: BRASS
CONTACT PLATING: GOLD PLATING OVER NICKEL ON CONTACT
AREA TIN PLATING ON TERMINAL

*MECHANICAL




MATING FORCE: 4.5 KG MAX. @ 25 MM/MINUTE
UNMATING FORCE: 1.0 KG MIN. AND 4.0 KG MAX. @25
MM/MINUTE
DURABILITY: 100 MATING CYCLES

*ELECTRICAL SPECIFICATION


INSULATION RESISTANCE: 1000 MEGOHMS MIN
DIELECTRIC WITHSTANDING VOLTAGE: 500 V DC RMS
±50 V.60 HZ
CURRENT RATING: 1.5 AMPERES MIN
SHELL RESISTANCE: 50 MILIOHMS MAX.INITIAL;50 MILIOHMS
MAX.CHANGE FROM INITAL
CONTOCT RESISTANCE: 20 MILLOHMS MAX.

*ENVIRONMENTAL

OPERRATING TEMPERATURE: -20°TO 85°

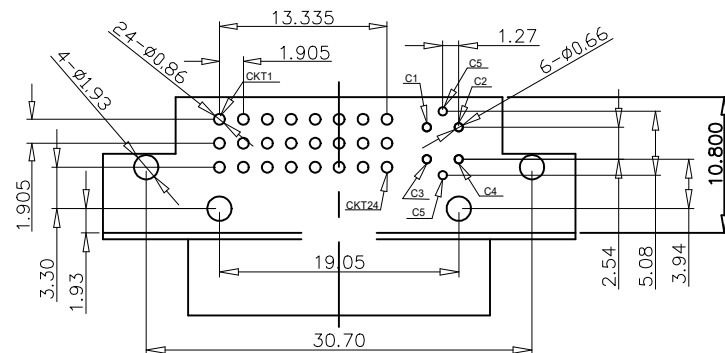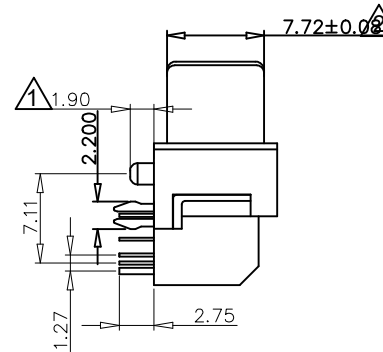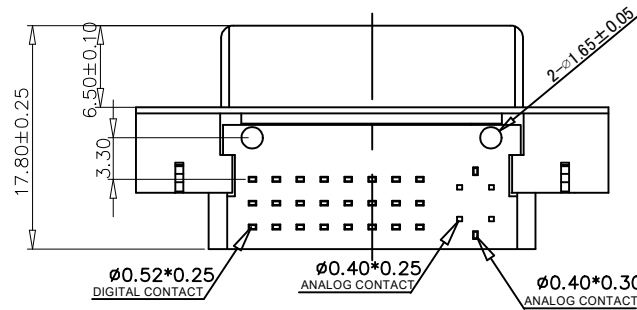

P.C.B LAYOUT

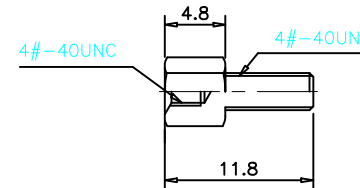

EAST-DVII29PX11XR

塑胶颜色:

W : 白色
B : 黑色

螺丝:

1:锁螺丝4.8
2:无螺丝
3:附螺丝
4:锁螺丝5.8

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°		COSTOMER COPY		深圳市东方御业科技有限公司 www.dfyyconn.com TEL:0755-27155560	
DRAWN: Qinkx		2017/09/10		TOTAL: DVI 24+5母 DIP 90度 铁壳不包边 后盖短柱 附螺丝 RoHS (RoHS)	
CHECKED: Chenl		2017/09/10		PART NO: EAST-DVII29PX11XR	
APPROVED: Chenl		2017/09/10		UNIT: mm	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyuye ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.		SCALE: N/A		SHEEL: REV.	