

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		






NOTE:

1. MATERIAL:

- a. HOUSING: PBT GLASS FIBRE UL94 V-0
- b. CONTACT: BRASS T=0.25mm
(SURFACE PLATING: Au1u" + Sn80-100u" + Ni60u")
- c. SHEEL: BRASS T=0.3mm IRON T=0.3mm
(SURFACE PLATING: Cu80-100u" Ni100u"-120u")

2. ELECTRIC:

- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c. DIELECTNIC VOLTAGE: 500V AC ONE MIN LEVEL
- d. OPERATING TEMPERATURE: -55° -85°

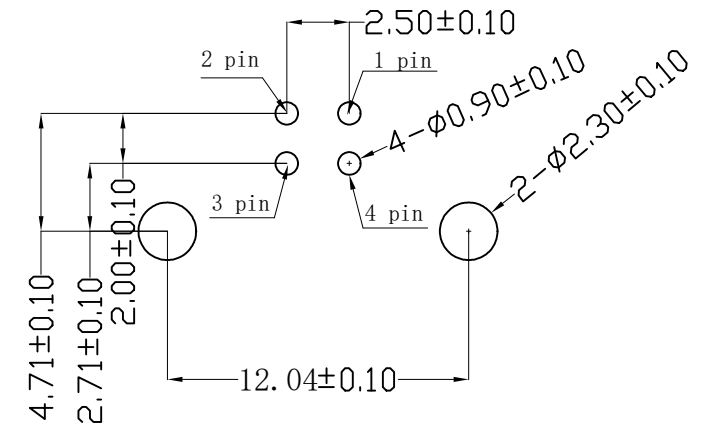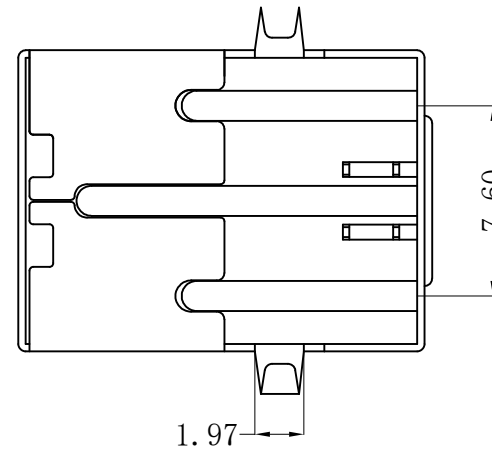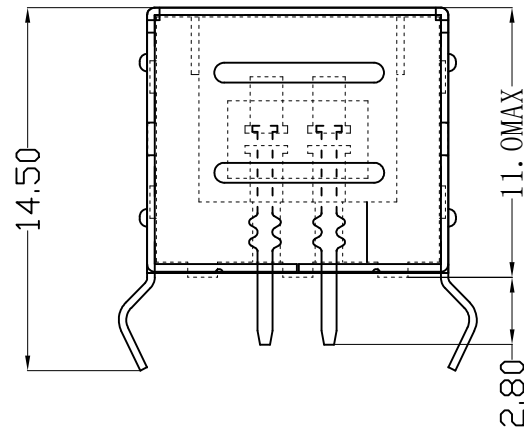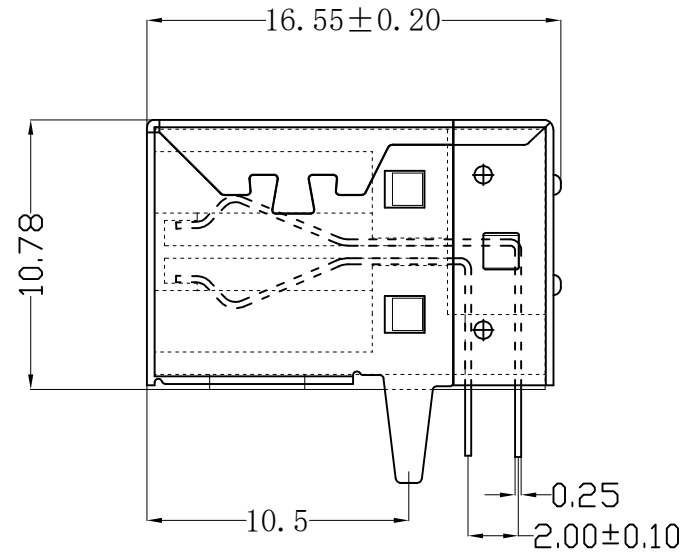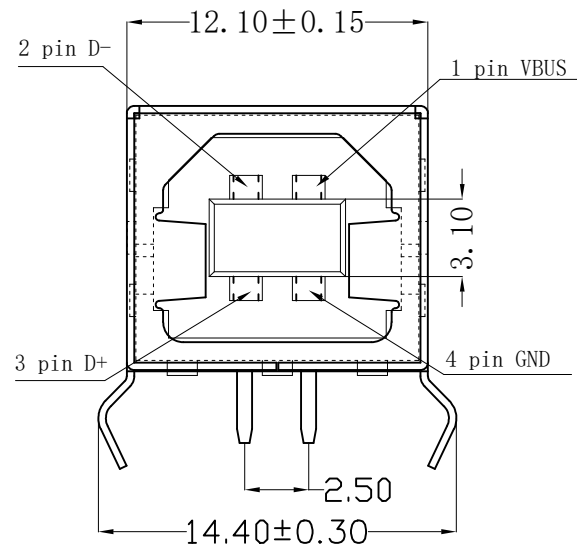

P. C. B. LAYOUT

EAST-USB2BF01X102X

塑胶材质:

B: 黑色

W: 白色

外壳材质:

1: 铁壳

2: 铜南

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X. X ± 0.38 X. XX ± 0.25 X. XXX ± 0.10 Angle ± 1°		COSTOMER COPY		深圳市东方御业科技有限公司 WWW.DFYCONN.COM TEL:0755-27155560	
DRAWN: CHENLEI		2017/09/10		TITAL: USB 2.0 BF 成品 (DIP) 弯脚90度 (RoHS)	
CHECKED: CHENLEI		2017/09/10		PART NO: EAST-USB2BF01X102X	
APPROVED: QINKAIXING		2017/09/10		UNIT: mm	SCALE: N/A
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.				SHEET: 1:1	REV.