

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION	2013/02/05	Mike

规格说明:Specifications:

电气特性:Electrical:



1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Level
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN
6. 盐雾: 24H/36H/48H

物理性能:Mechanical:

1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
2. 端子保持力: Terminal Retenion
1.0kgf (MIN)

原材料:Material:


1. 塑胶:Housing:
Hing Temperature Thermaplastics,
LCP/Black/PBT/Black
2. 端子:Contact:Copper Alloy C2680
Plated Gold in Mating Area;
Tin On Solder Talls
3. 外壳:Shell: Copper Alloy BRASS
Nickel Plating



EAST-USB223X102X

塑胶: B: PBT 黑色
W: PBT 白色
LB: LCP 黑色
LW: LCP 白色



外壳材质: 1: 铁壳
2: 铜壳

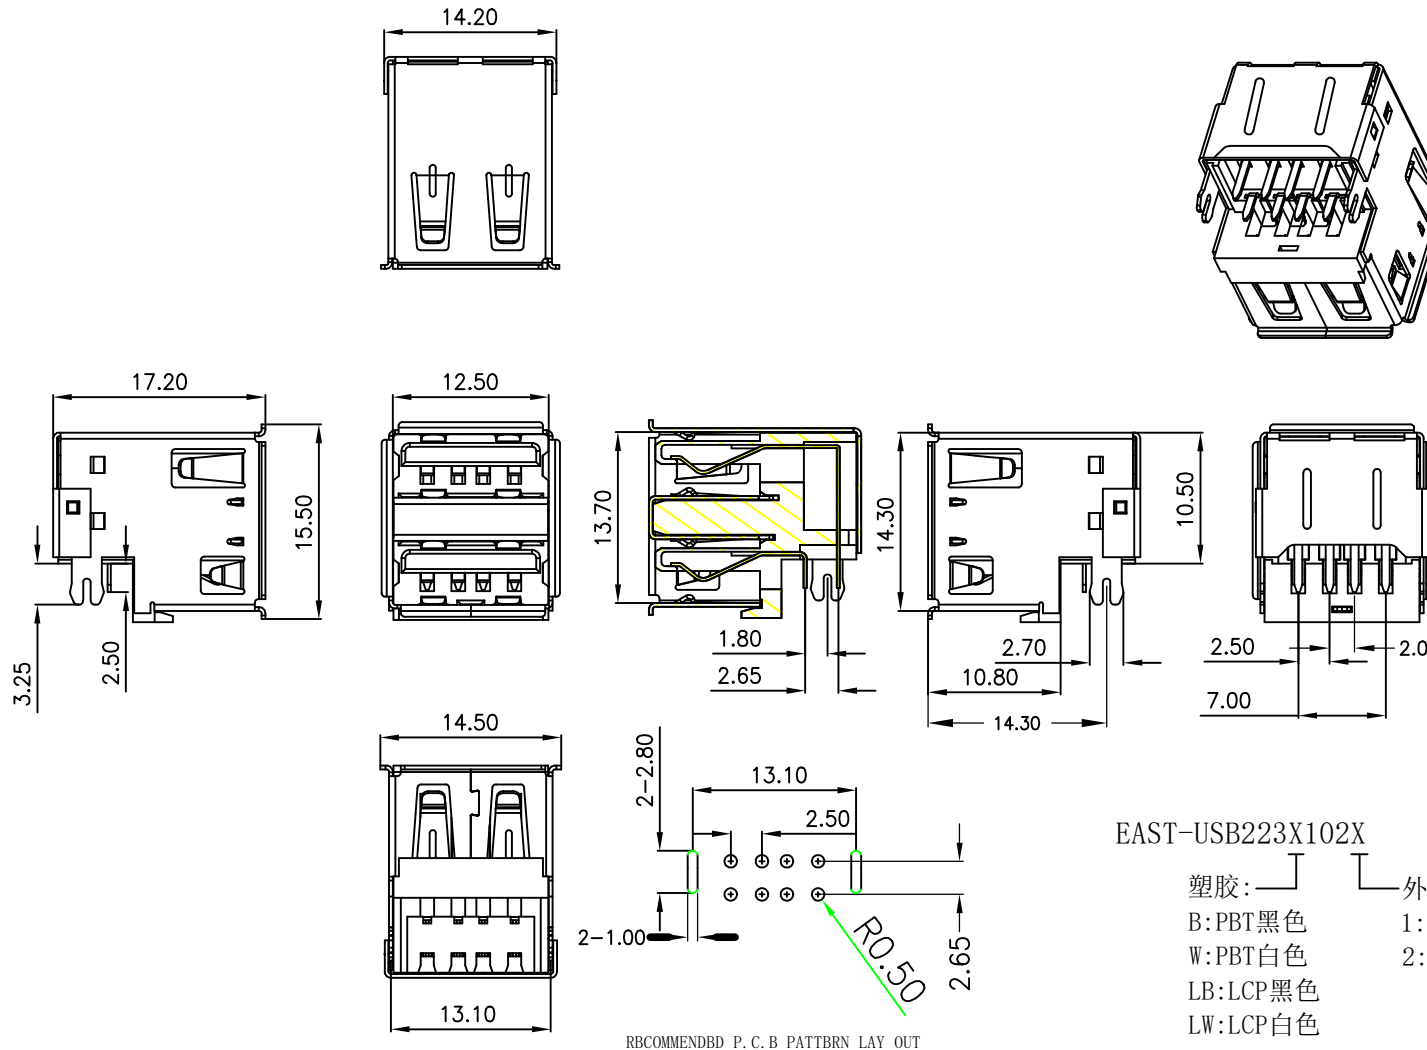

RBCOMMENDD P. C. B PATTBRN LAY OUT

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°		INSPECTION COPY		深圳市东方御业科技有限公司 www.dfyyconn.com TEL:0755-27155560	
DRAWN: chenlei		2013/02/05		TITL: USB AF双层沉板10.50有卷边	
CHECKED: qinkx		2013/02/05		PART NO: EAST-USB223X102X	
APPROVED: qinkx		2013/02/05		UNIT: mm	SCALE: N/A
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen dongfangyue CO.,LTD. SHALL NOT BE REPRODUCED.				SHEEL: 1/1	REV. A

REV.	ECN NO.	MODIFY	MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		2013/02/05	Mike

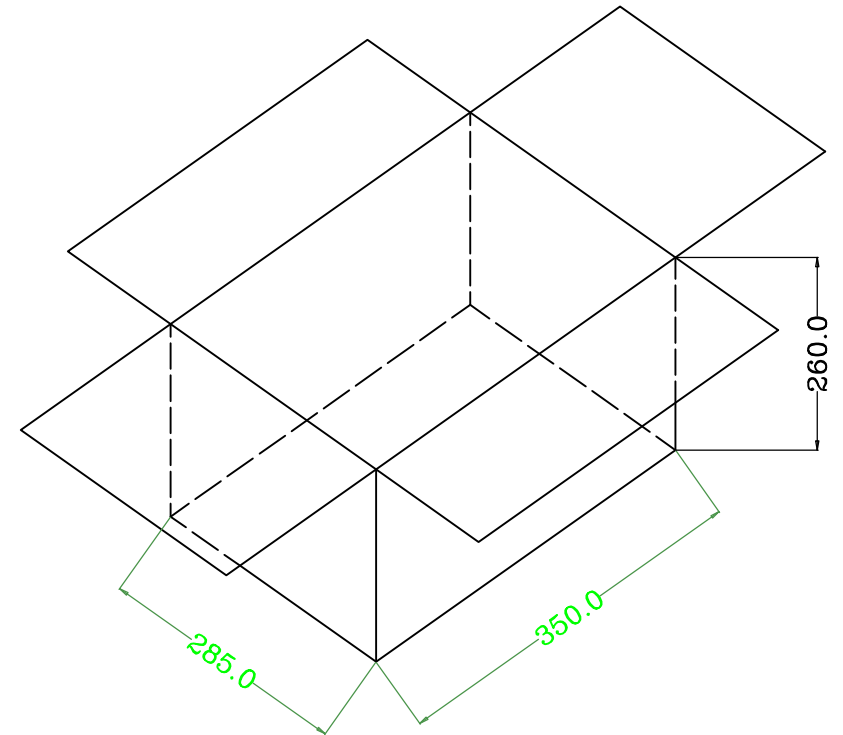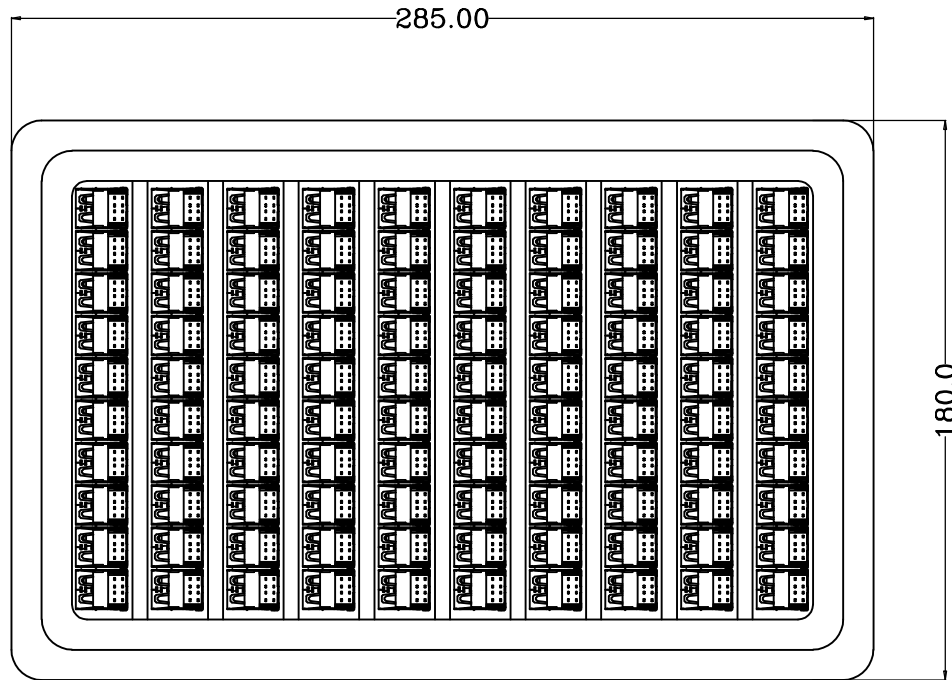

- 1, 包装盒为PVC透明吸塑盒
- 2, 每盒包装数量为100PCS
- 3, 每箱包装数量为3000PCS
- 4, 纸箱规格为350*285*260MM
- 5, 100PCS*10盘*2捆
- 6, 100PCS*5盘*2捆

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	INSPECTION COPY		深圳市东方御业科技有限公司	
	DRAWN: chenlei		TITIAL: USB AF双层沉板包装图	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen dongfangyue CO.,LTD. SHALL NOT BE REPRODUCED.	CHECKED: qinkx		PART NO:	
	APPROVED: qinkx		UNIT: mm	
		2013/02/05	SCALE: N/A	SHEEL: 1/1
		2013/02/05		REV. A