

REV.	ECN NO.	MODIFY	MATTER	DATE	APPROVED
A			RELEASE TO PRODUCTION		

注:

1. 机械性能:

插入力:35N Max.

拔出力:10N Min.

耐插拔:3000 次

工作温度:0℃~+50℃

储存温度:-20℃~60℃




2. 电性能:

额定电流:1.5A Max.

接触阻抗:30 mΩ Max.

耐高压:500V AC Min.

绝缘阻抗:1000 MΩ Min.

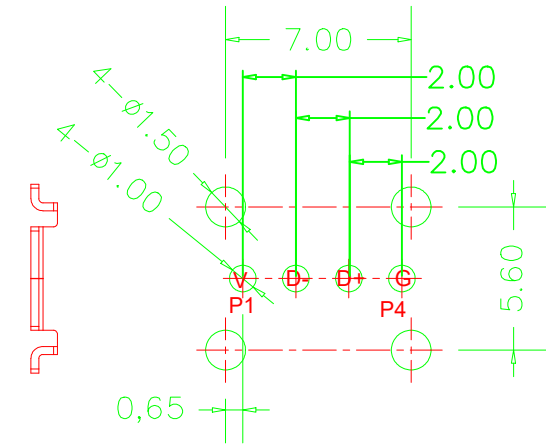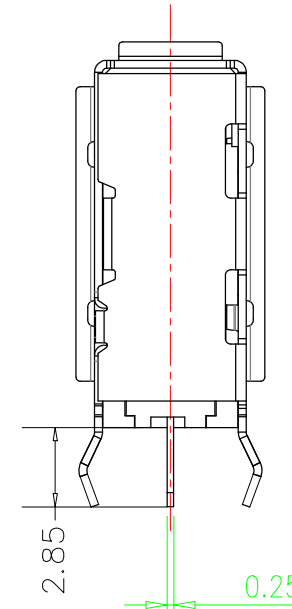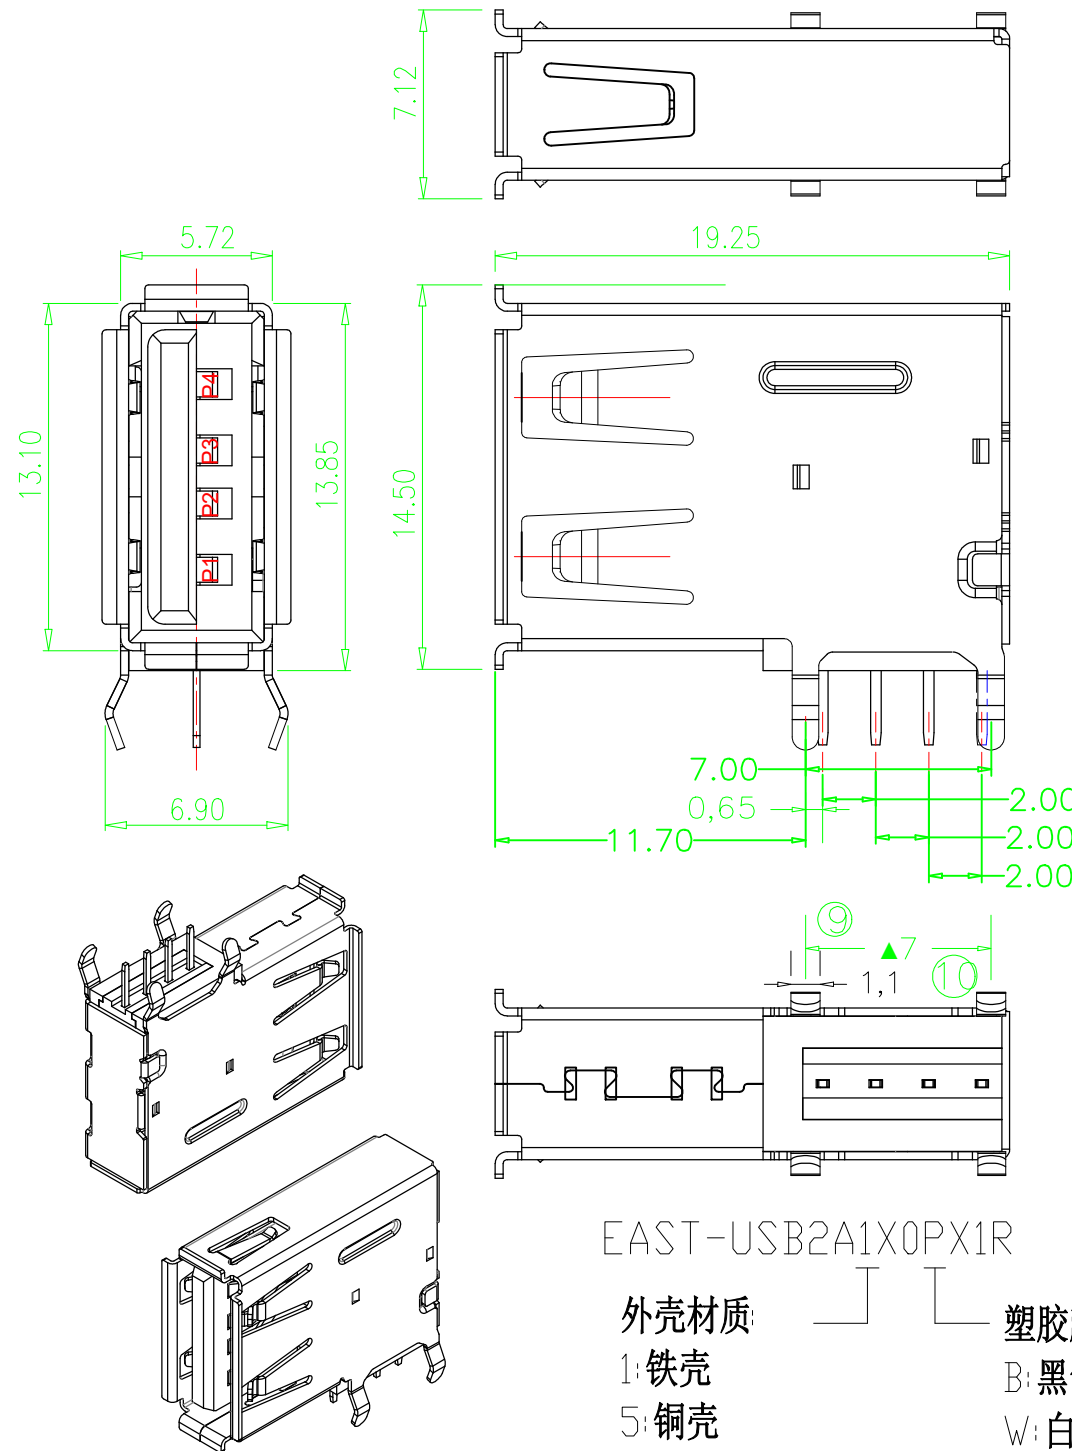

Recommend PCB layout

EAST-USB2A1X0PX1R

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.10 Angle ±1°		COSTOMER COPY DRAWN: CHENLEI CHECKED: CHENLEI APPROVED: QINKAIXING		深圳市东方御业科技有限公司 www.dfyyconn.com Tel:075527155560	
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.		2017/09/10		TITL: USB 2.0 AF 侧立长体有卷边 (RoHS)	
2017/09/10		2017/09/10		PART NO: EAST-USB2A110PB1R	
2017/09/10		2017/09/10		UNIT: mm SCALE: N/A SHEET: 1:1 REV.	