

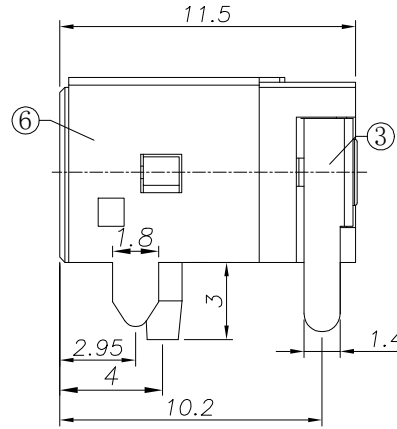
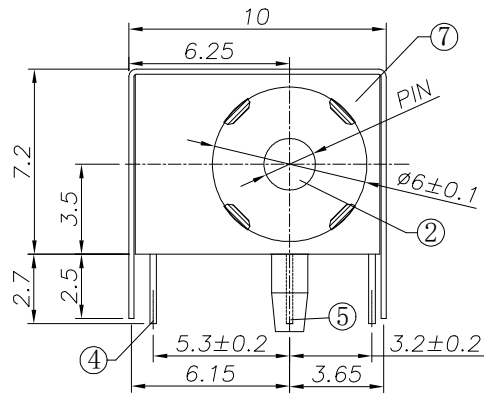


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

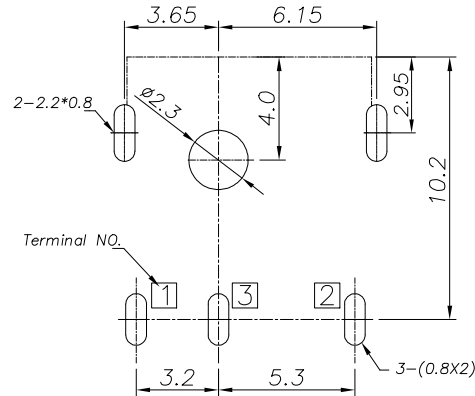

- SPECIFICATION**
1. Rating : DC 12V 3.0A;
 2. Contact resistance: $\leq 50\text{m}\Omega$;
 3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V);
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3-30N;
 6. life test: 5,000 cycles.





P.C.B. LAYOUT
TOP VIEW

EAST-DC-044-X. XX-X

中心针: —
2. 00:Ø2. 0mm
2. 50:Ø2. 5mm
1. 65:Ø1. 65mm

塑胶材质: —
P:PBT
L:LCP

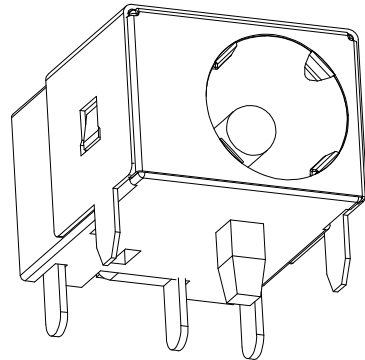

Model NO.	EAST-DC-044
Schematic	

7	外壳	1			
6	盖脚	1			
5	插针	1			
4	平片	1			
3	弯片	1			
2	弹片	1			
1	基座	1			
NO.	DESCRIPTION	QTY	MATERIAL	COLOR	REMARK
TOLERANCES UNLESS OTHERWISE SPECIFIED: X. — X. X ± 0.38 X. XX ± 0.25 X. XXX ± 0.10 Angle ± 1°			COSTOMER COPY		
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.			深圳市东方御业科技有限公司 www.dfyyconn.com Tel:075527155560		
DRAWN: CHENLEI			TITL: DC JACK044款包外壳 (RoHS)		
CHECKED: CHENLEI			PART NO: EAST-DC-044-X. XX-X		
APPROVED: QINKAIXING			UNIT: mm		
			SCALE: N/A		
			SHEEL: 1:1		
			REV.		