

REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

SPECIFICATIONS:

Contact current Rating:

1.8 Amperes for pin1&pin4.

0.25 Amperes other contacts

Dielectric Withstanding Voltage:AC 100V(RMS)

Insulation resistance:100Megohms Minimum.

Contact Resistance:

30mΩ Max for pin1&pin4


50mΩMax for other contacts

Mechanical Characteristics:

Mating Force:3.5 Newtons.Maximum

Unmating Force:10 Newtons.Minimum.




operating Temperature:-55iãto+85iã

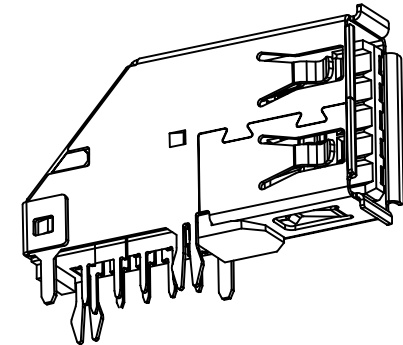

Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND
4	GND	8	SSTX-
Shell	Shield	9	SSRT+





ITEM	PART NAME	Material	Q'TY	REMARK
1	4P Semi-manufactured Goods	Housing LCP&PBT	1	Black &Blue UL94V-0
2		Contact COPPER ALLOY	4	T=0.20 Plating Gld/Tin
3	5P Semi-manufactured Goods	Housing PBT	1	Black &Blue UL94V-0
4		Contact COPPER ALLOY	5	T=0.20 Plating Gld/Tin
5	Shell	SUS304-1/2H	1	T=0.25

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	COSTOMER COPY		深圳市东方御业科技有限公司 Tel:0755-27155560 WWW.DFYCONN.COM		
THESE DRAWING AND SPICAFION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.	DRAWN: Qinkx	2017/09/10	TITAL: USB 3.0 AF侧立式有卷边 (RoHS)		
	CHECKED: Chenl	2017/09/10	PART NO: EAST-U3AB-1L701R		
	APPROVED: Chenl	2017/09/10	UNIT: mm		SCALE: N/A

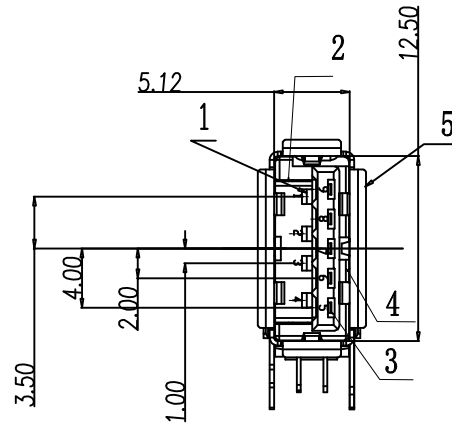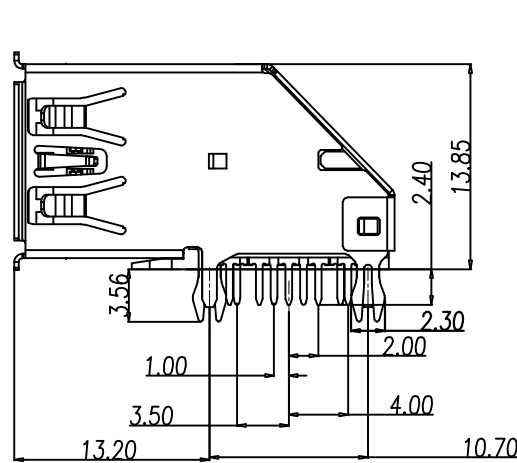


EAST-U3AB-1L701R

- 1:铁壳镀镍
- 5:铜壳镀镍
- B:不锈钢镀镍
- 1:半金1u"
- 3:半金3u"
- 5:半金5u"
- 7:半金10u"
- 8:半金15u"
- A:半金30u"
- R:RoHS
- 1:有卷边
- 2:无卷边
- 1:黑色
- 7:蓝色300C
- P:PBT
- L:LCP

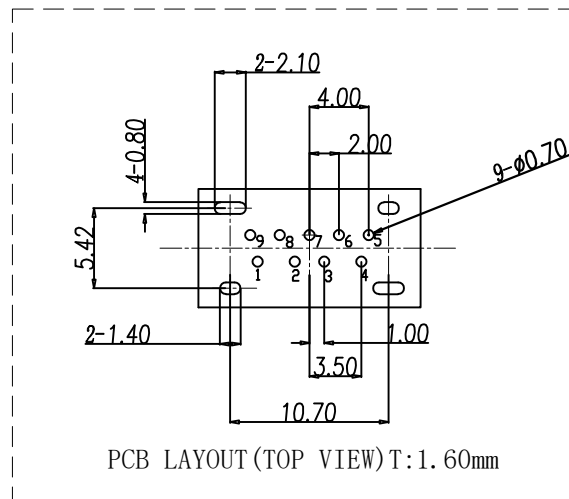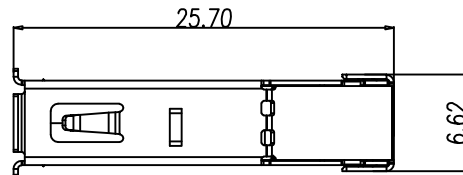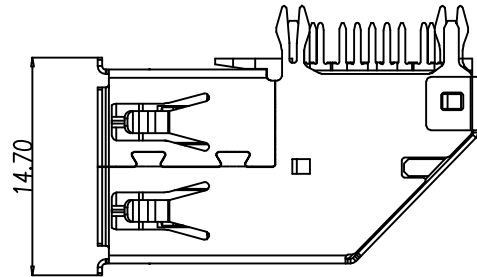

PCB LAYOUT (TOP VIEW) T:1.60mm


REV.	ECN NO.	MODIFY MATTER	DATE	APPROVED
A		RELEASE TO PRODUCTION		

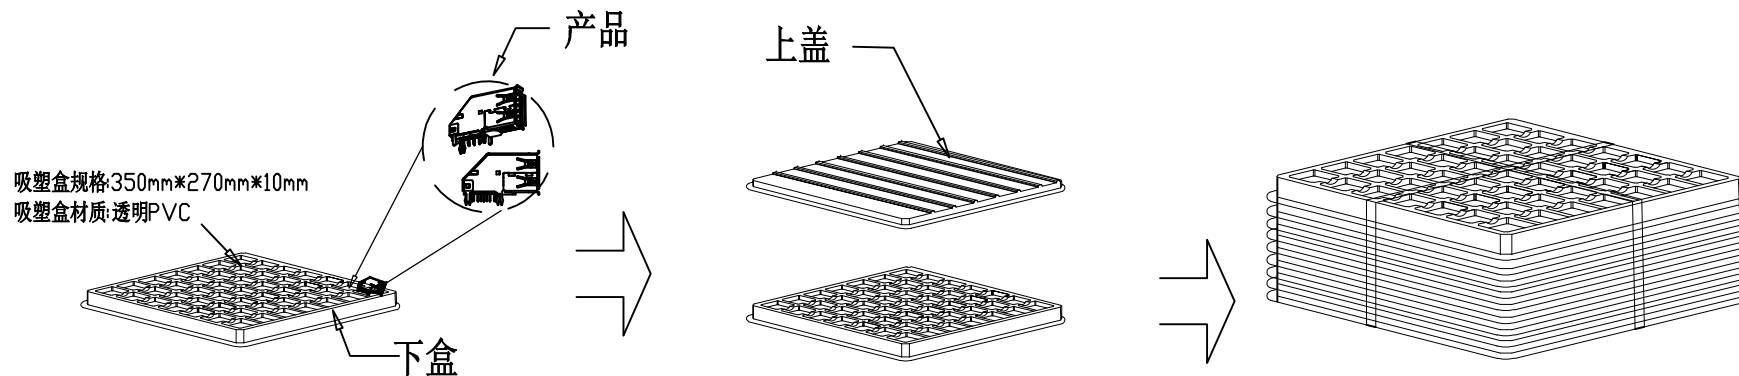


① 吸塑盒(1Set).100Pcs/盒

② 盖好上盖


③ 每20盘用透明胶带绑紧/捆

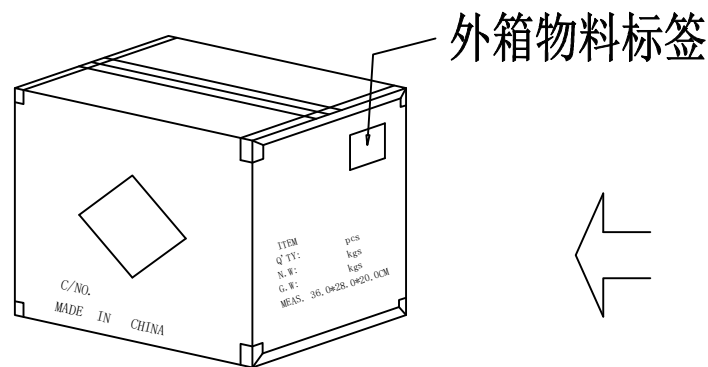

⑥ 依图示粘贴产品其它标签.



⑤ 外箱用透明胶带封“工”字型.

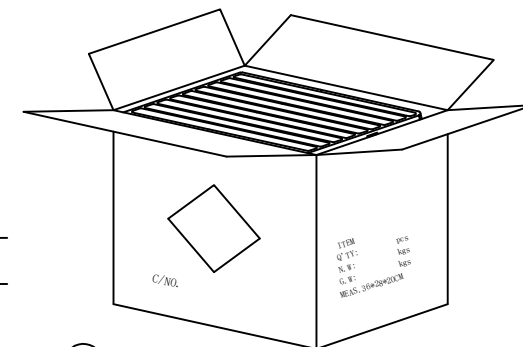

④ 每箱平放1捆产品,若尾数箱在空间处加装填充物.
一箱(2k).
纸箱规格: 36.0*28.0*20.0CM
纸箱材质: K=K

备注:
1. PE真空盒1Set
2. 每盒装成品100Pcs,
3. 每箱装20盒,
4. 外箱尺寸与规格印刷: 详见包材图面;
5. 外箱用透明胶带封“工”字型;
6. 依外箱图示位置粘贴好产品或其它标签
(若客户另有贴标签要求,则按其定单注明之要求贴)

每箱数量	净重	毛重
2K套/箱		5.05KG

TOLERANCES UNLESS OTHERWISE SPECIFIED: X. --- X.X ± 0.38 X.XX ± 0.25 X.XXX ± 0.20 Angle ± 3°	COSTOMER COPY DRAWN: Qinkx CHECKED: Chenl APPROVED: Chenl	2017/09/10 2017/09/10 2017/09/10	TOTAL: USB 3.0 AF 侧插90度 包装图 (RoHS) PART NO: EAST-U3AXXX UNIT: mm
THESE DRAWING AND SPECIFICATION ARE THE PROPERTY OF Shenzhen Dongfangyue ELECTRONIC CO., LTD.. SHALL NOT BE REPRODUCED.	SCALE: N/A	SHEET: REV.	